
ALFA1035E1HDS

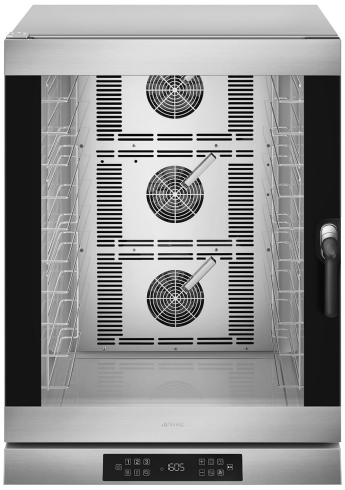

Family	Professional ovens
Subfamily	Convection oven 10 trays EN 600x400 mm or GN1/1
Oven type	Convection oven with humidification
Oven control	Electronic
Trays capacity	10 trays GN1/1 or 10 EN 600x400 mm (excluding flat grids and trays)
Power supply	400 V 3N~ / 23A / 16 kW / 50-60 Hz
Steam generation	Direct
Program storage with application	Not available
Maximum depth with open door	1536 mm
Adjustable feet	Yes
Net weight	102,000 kg
Product dimensions WxDxH	798x772x1100 mm
EAN code	8017709322953

Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail	**Suggested for**	Bakery

Aesthetics

Colour	Stainless steel	**Digit display color**	White
Door with stainless steel stripes	Yes	**Front panel**	Yes
Display type	Digital TFT	**Logo**	Smeg printed

Controls

Storable programs number	100	**Chimney regulation**	Yes
Timer setting range	1-99 minutes + endless	**HACCP data**	Yes
Cooking steps	3 + pre-heating		

Programme / Functions

Backing functions

 Convection

 Convection with humidification

 Core probe

 Core probe + Δ t

Adjustable fan speed


 Double speed fan

Options

Right hand hinge	ALFA1035E1HDSR	**Combinable hood**	K4610X

Construction

Oven materials	Stainless steel / glass / plastics	**Water injection on each fan**	Yes
Cavity dimensions (wxdxh)	672x437x854 mm	**Humidification levels**	5 + manual
Gross volume	289,8 lt	**Exhaust position**	Back
Net volume	258,9 lt	**Components cooling system**	Yes
Internal net volume	199,1 lt	**Timer type**	Electrical
Cavity material	Stainless steel	**Temperature range**	50-280°C
Shelves number	10	**End cooking signal**	Yes
Tray frame support	Chromed wire	**Safety switch with open door**	Yes
Shelves distance	77 mm	**Manual reset safety thermostat**	Yes
Door construction	Double glass	**Predisposition for core probe**	Yes
Door opening	Lateral - left hinge	**Removable deflector**	Yes
Handle type	Rotating	**Lighting**	3 Halogen lamps
Glass	Openable with hinge	**Light power**	40 W
Fan type and number	3 contrarotating with timed direction reversal	**USB port**	Yes
Fan motor power	200W	**Water load pipe**	Yes
Engine rpm	Dual speed	**Power cable length**	170 cm
Motor rpm in standard speed	2850 rpm	**Back panel**	Galvanized
Motor rpm in low speed	1450 rpm	**IPX protection**	IPX3

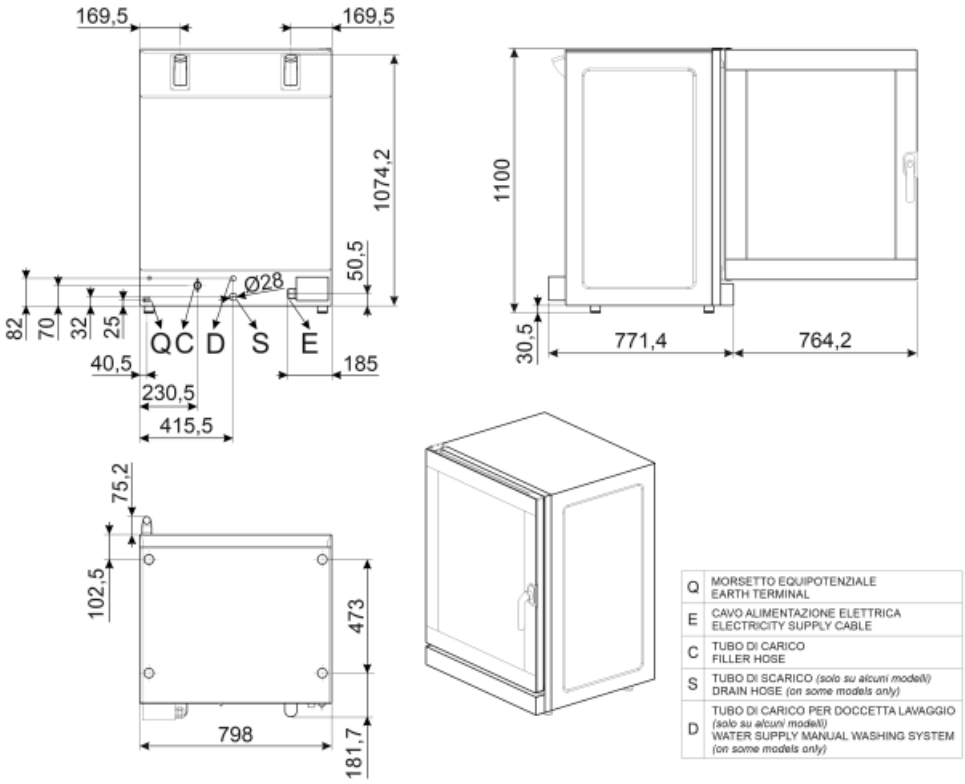

Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO FILLER HOSE
S	TUBO DI SCARICO *(solo su alcuni modelli)* DRAIN HOSE *(on some models only)*
D	TUBO DI CARICO PER DOCCETTA LAVAGGIO *(solo su alcuni modelli)* WATER SUPPLY MANUAL WASHING SYSTEM *(on some models only)*

Not included accessories



3805

Flat chrome-plated wire grid (4pcs)




3927

Air flow reducer kit for ovens ALFA410, 420, 625, 1035



K4610X




TF11XH2

Perforated aluminium GN1/1 tray, 20 mm height



3743

Flat aluminium tray (4pcs)



TMF11TH2

GN 1/1 non-sticking microperforated tray, 20 mm height



T11XH20

2cm height aluminium GN1/1 tray, 20 mm height




T11XH65

GN1/1 aluminium tray, 65 mm height



T11TH20

GN1/1 non-stick tray, 20 mm height




G11X8P

8 vertical GN1/1 chicken grid

KITSC

Core temperature probe for EHDS models




G11T

Non-stick GN1/1 tray




3751

Flat perforated aluminium tray (4pcs)




3810

Waved grid for baguettes (4pcs)



RGN11-1035-2

Support kit for grids or flat trays GN1/1 suitable for ALFA1035 models



T8S11T

8 holes GN 1/1 non-sticking tray



T11TH40

GN1/1 non-stick tray, 40 mm height



TVL625D

Oven stand on castors for stacked ALFA625/420, 800x800x300mm

Symbols glossary (TT)



Core probe



Core probe baking by temperature difference (Δ t)



Fan forced heating



Fan forced heating with humidity injection



Double speed fan