ALFA43XE2HDS

Family	Professional ovens
Subfamily	Convection oven 4 trays 435x320 mm
Oven type	Convection oven with humidification
Oven control	Electronic
Trays capacity	4 trays 435x320 mm
Power supply	230 V~ / 13 A / 3,0 kW / 50 Hz
Steam generation	Direct
Program storage with application	Not available
Maximum depth with open door	1178 mm
Adjustable feet	Yes
Net weight	36.700 kg
Product dimensions WxDxH	602x600x537 mm
EAN code	8017709309787



Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail; QSR

Aesthetics

Colour	Stainless steel	**Digit display color**	White and red
Door with stainless steel stripes	Yes	**Front panel**	Yes
Display type	LCD	**Logo**	Smeg printed

Controls

Storable programs number	99	**Cooking steps**	2 + pre-heating
Timer setting range	from 1 minute to 99 hours + endless		

Programme / Functions

Backing functions

Convection

Convection with humidification

Adjustable fan speed

 Double speed fan

Options

Combinable hood	K43X

Accessories Included


Aluminized tray 3820	kit of 4 pieces	**Water connection pipe**	Yes

Electrical Connection

Plug	(F;E) Schuko

Construction

Oven materials	Stainless steel / glass / plastics	**Water injection on each fan**	Yes
Cavity dimensions (wxdxh)	460x360x425 mm	**Humidification levels**	5 + manual
Internal net volume	54,5 lt	**Exhaust position**	Back
Cavity material	Ever Clean enamel	**Timer type**	Electrical
Shelves number	4	**Temperature range**	30-270°C
Tray frame support	Chromed wire	**End cooking signal**	Yes
Shelves distance	80 mm	**Safety switch with open door**	Yes
Door construction	Triple glass	**Manual reset safety thermostat**	Yes
Door opening	Tilting	**Removable deflector**	Yes
Handle type	Fixed	**Lighting**	1 Halogen lamp
Glass	With clip	**Light power**	40 W
Fan type and number	Fan with fixed rotation	**Water load pipe**	Yes
Fan motor power	Dual speed	**Power cable length**	115 cm
Engine rpm	Dual speed	**Back panel**	Galvanized
Motor rpm in standard speed	2700 rpm	**IPX protection**	IPX3
Motor rpm in low speed	2100 rpm		

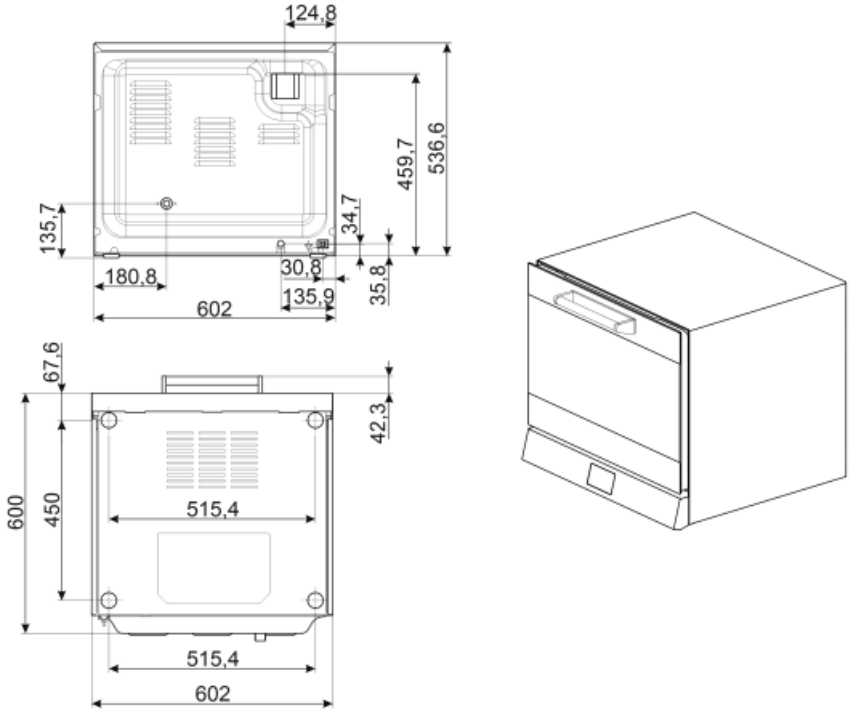
124,8
459,7
536,6
135,7
34,7
180,8
30,8
35,8
135,9
602
67,6
42,3
600
450
515,4
515,4
602

Not included accessories




3820

Flat aluminised steel tray (4pcs)



4730

External tank kit 5 lt.



3780

Flat non-stick trays (4pcs)



3755

Flat perforated aluminium tray (4pcs)



3926

Air flow reducer kit for ALFA43 ovens

Symbols glossary (TT)


Double speed fan


Fan forced heating


Fan forced heating with humidity injection