ALFA625H-2



Family	Professional ovens
Subfamily	Convection oven 6 trays en 600x400 mm or GN1/1
Oven type	Convection oven with humidification
Oven control	Manual
Trays capacity	6 trays EN 600x400 mm or GN1/1 (excluding flat trays and grids)
Power supply	400 V 3N~ / 16 A / 10,5 kW / 50-60 Hz
Steam generation	Direct
Program storage with application	Not available
Maximum depth with open door	1521 mm
Adjustable feet	Yes
Net weight	76,000 kg
Product dimensions WxDxH	798x757x793 mm
EAN code	8017709270193

Target

Solutions	Coffee shops/Wine bars; Hotels; Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Food retail	**Suggested for**	Bakery

Aesthetics

Colour	Stainless steel	**Front panel**	Yes
Door with stainless steel stripes	Yes	**Logo**	Smeg printed

Controls

Timer setting range	1-60 minutes + endless	**Chimney regulation**	Manual

Programme / Functions

Backing functions

Convection


Convection with humidification

Options

Right hand hinge	ALFA625HR-2	**Combinable hood**	K4610X

Construction

Oven materials	Stainless steel / glass / plastics	**Water injection on each fan**	Yes
Cavity dimensions (wxdxh)	672x437x546 mm	**Humidification levels**	Manual
Gross volume	184,8 lt	**Exhaust position**	Back
Net volume	165,6 lt	**Timer type**	Electric
Internal net volume	127,3 lt	**Temperature range**	50-270°C
Cavity material	Stainless steel	**End cooking signal**	Yes
Shelves number	6	**Orange light indicator t° achievement**	Yes
Tray frame support	Chromed wire	**Green light indicator time achievement**	Yes
Shelves distance	77 mm	**Safety switch with open door**	Yes
Door construction	Double glass	**Manual reset safety thermostat**	Yes
Door opening	Lateral - left hinge	**Removable deflector**	Yes
Handle type	Rotating	**Lighting**	2 LED lamps
Glass	Openable with hinge	**Light power**	40 W
Fan type and number	2 contrarotating with timed direction reversal	**Water load pipe**	Yes
Fan motor power	Progressive %	**Power cable length**	170 cm
Engine rpm	Single speed	**Back panel**	Galvanized
Motor rpm in standard speed	2850 rpm	**IPX protection**	IPX3

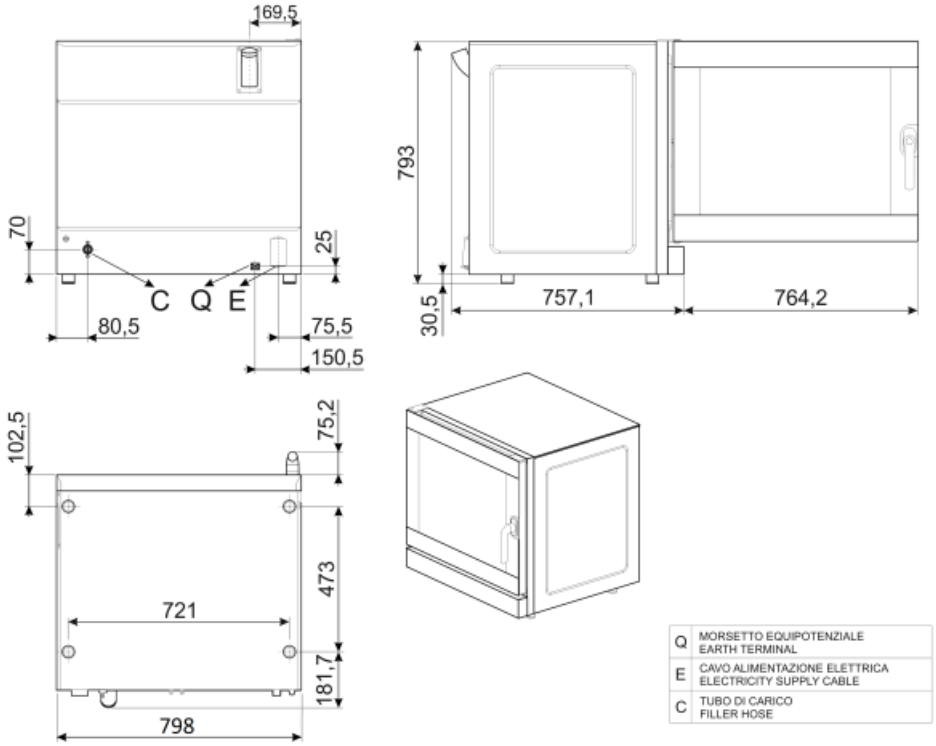

Not included accessories




3805

Flat chrome-plated wire grid (4pcs)



3927

Air flow reducer kit for ovens ALFA410, 420, 625, 1035




TF11XH2

Perforated aluminium GN1/1 tray, 20 mm height



3743

Flat aluminium tray (4pcs)



TMF11TH2

GN 1/1 non-sticking microperforated tray, 20 mm height

SVRPP625

Connector kit for two stacked ALFA625 or ALFA625+ALFA420/425 models and hood



T11XH20

2cm height aluminium GN1/1 tray, 20 mm height



SVRPP420-625

Connector kit for two stacked ALFA420+420 or ALFA420+625 models and hood




T11XH65

GN1/1 aluminium tray, 65 mm height




T11TH20

GN1/1 non-stick tray, 20 mm height




G11X8P

8 vertical GN1/1 chicken grid



RGN11-625-2

Support kit for grids or flat trays GN1/1 suitable for ALFA625 models




G11T

Non-stick GN1/1 tray




3751

Flat perforated aluminium tray (4pcs)



3810

Waved grid for baguettes (4pcs)



T8S11T

8 holes GN 1/1 non-sticking tray



T11TH40

GN1/1 non-stick tray, 40 mm height

Symbols glossary (TT)



Fan forced heating



Fan forced heating with humidity injection