EN

# Piccola




blupure

ALWAYS COOLER

# Piccola

15 lt/h

Gas R600

BDC

## “PICCOLA”, THE GREAT DESIGN SOLUTION FOR BOTH HOME AND OFFICE.

### All the water you want, and unrivaled practicality in a small space.

Attractive and incredibly compact in its dimensions, Piccola stands out for its versatility, in both aesthetic and functional terms. Available in white or black versions, to allow it to fit seamlessly into any surrounding, Piccola offers a full four dispensing options: still, slightly sparkling, sparkling cold water and room temperature water.






The Piccola Hot model dispenses hot water up to 85°C, perfect for making teas and infusions. Piccola Hot features LED dispensing buttons with an alarm in the event of the absence of water, overflow or boiler malfunction, in addition to Energy Saving function.



Piccola is available in black or white to satisfy the taste of the user and to blend within any environment.



Choosing a product like Piccola means making a sustainable choice, giving up the plastic of the bottles and always having fresh quality water, still and sparkling.



Design and functionality! Piccola Cabinet is made entirely of black painted sheet metal, with a wider base equipped with for rubber feet to ensure maximum stability. A lock allows access to the inner compartment, where filters and $CO_2$ cylinders are placed, in addition to tank alarm LED set-up.




The delivery area is illuminated and 27cm high allowing the insertion of bottles and water bottles.
The forced ventilation grille is positioned laterally, while the convenient drip tray is integrated.
Natural Gas
An environmentally friendly choice, with the benefit of a more silent compressor.



| | Lt./h | Fizz | Medium | Ambient | Cold | Hot | Dispensing area He (mm) | Weight (kg) | Dimensions W x D x H (mm) |
|---|---|---|---|---|---|---|---|---|---|
| Piccola 15 | 15 | | | • | • | | 281 | 12,5 | 240 x 451 x 425 |
| Piccola 15 Fizz | 15 | • | • | • | • | | 281 | 16,3 | 240 x 451 x 425 |
| Piccola Hot 15 | 15 | | | • | • | • | 281 | 14,2 | 240 x 451 x 425 |
| Piccola Hot 15 Fizz | 15 | • | | • | • | • | 281 | 18,4 | 240 x 451 x 425 |
| Piccola White 15 | 15 | | | • | • | | 281 | 12,5 | 240 x 451 x 425 |
| Piccola White 15 Fizz | 15 | • | • | • | • | | 281 | 16,3 | 240 x 451 x 425 |
| Piccola White Hot 15 | 15 | | | • | • | • | 281 | 14,2 | 240 x 451 x 425 |
| Piccola White Hot 15 Fizz | 15 | • | | • | • | • | 281 | 18,4 | 240 x 451 x 425 |

## OPTIONAL EXTRAS

In-line filters

- Filter + Head
- UVC Led In

Outlet filters

- UVC Led OUT
- or
- Nano Silver Pipe

Other


- Bluprotection

- Water pressure reducer
- $CO_2$ pressure reducer with 1 pressure gauge (only for Fizz models)
- Incremental digital litre-counter 6000R
- or
- Decremental digital litre-counter 8000T
- Piccola Cabinet
- 5 Lt. tank with re-fill alarm (for use with Piccola Cabinet)

Given its commitment to continuous technological development, Blupura reserves the right to enhance or modify the products shown in this catalogue without prior notice.

| TECHNICAL PROFILE | PICCOLA<br>15 Fizz | PICCOLA<br>Hot 15 Fizz | PICCOLA WHITE<br>15 Fizz | PICCOLA WHITE<br>Hot 15 Fizz |
|---|---|---|---|---|
| Cooling capacity | 15 (Lt/h.) | 15 - 8 (Lt/h.) | 15 (Lt/h.) | 15 - 8 (Lt/h.) |
| Temperature of cold water* | 5° - 12° C | 5° - 12° C | 5° - 12° C | 5° - 12° C |
| Cooling technology | BDC | BDC | BDC | BDC |
| Cold water coil | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 | Stainless steel AISI 316 |
| Max. hot water temperature | - | 82° C +/-5% | - | 82° C +/-5% |
| Hot water tank | - | 1 Lt. | - | 1 Lt. |
| Cooling | Forced ventilation | Forced ventilation | Forced ventilation | Forced ventilation |
| Adjustable thermostat | Yes | Yes | Yes | Yes |
| Refrigerant Gas | HC R600a | HC R600a | HC R600a | HC R600a |
| Professional carbonation pump | Membrane | Membrane | Membrane | Membrane |
| Power supply | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz | 230 V - 50 Hz |
| Power consumption | 190 W | 810 W | 230 W | 1100 W |
| Max. absorption | 1,05 A | 3,4 A | 1 A | 4,94 A |
| Ambient cooling temperature | Min 16°C - Max 32°C | Min 16°C - Max 32°C | Min 16°C - Max 32°C | Min 16°C - Max 32°C |
| Materials | ABS plastic | ABS plastic | ABS plastic | ABS plastic |

*estimated at an ambient temperature of 25°C and an incoming water temperature of 20°C

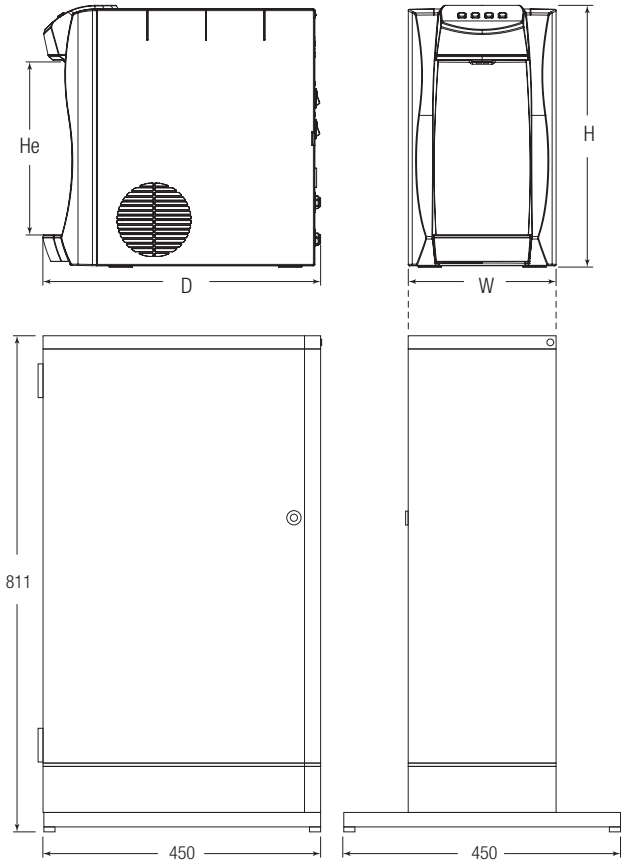




ALWAYS COOLER

Blupura S.r.l. - Via Volponi, 11 - 62019 Recanati (Mc) - Italy
Tel. +39 071 971 0080 - info@blupura.com
Blupura Usa - 1200 Brickell Ave, Suite 1950 - Miami (FL) 33131 - USA - Tel. +1 305 777 3591 - blupurausa@blupura.com
**www.blupura.com**

