Data sheet

EBE65TLRX

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**GRIDDLES**	**ELECTRIC**	**EBE65TLRX**



DESCRIPTION

EL. FRYTOP 100 CM SMOOTH/RIBBED HOTPLATE
AISI 430

TECHNICAL DATA:

STRUCTURE	TOP
WIDTH	1000 mm
DEPHT	650 mm
HEIGHT	295 mm
NET WEIGHT	75 kg
VOLUME	0.56 m3
ELECTRIC POWER	11.7 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 10123720962

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 50.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2507533- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**GRIDDLES**	**ELECTRIC**	**EBE65TLRX**

FEATURES:

Electric Fry-Top, 2/3 smooth and 1/3 ribbed hotplate, 99.6x55.5 cm, equipped with splashback on three sides and front drainage with extractable grease tray. Heating by means of shielded electrical resistance located underneath the hotplate. Three thermostat operated cooking zones with a setting range between 0°C and 300°C. Manually resettable safety thermostat. Stainless steel kitchen shovel included.

STANDARD ACCESSORIES:

OPTIONAL ACCESSORIES:

• SCRAPER FOR SMOOTH CHROMED HOTPLATE	XFT-R
• KIT 10 BLADES FOR SCRAPER	XFT-LR
• DRAIN CAP FOR HOTPLATE CLEANING	XFTT
• JOINT COVER LH	CGBS
• JOINT COVER RH	CGBD

SILKO ALI Group Srl


Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 10123720962

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 50.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2507533- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**GRIDDLES**	**ELECTRIC**	**EBE65TLRX**

INSTALLATION SCHEME

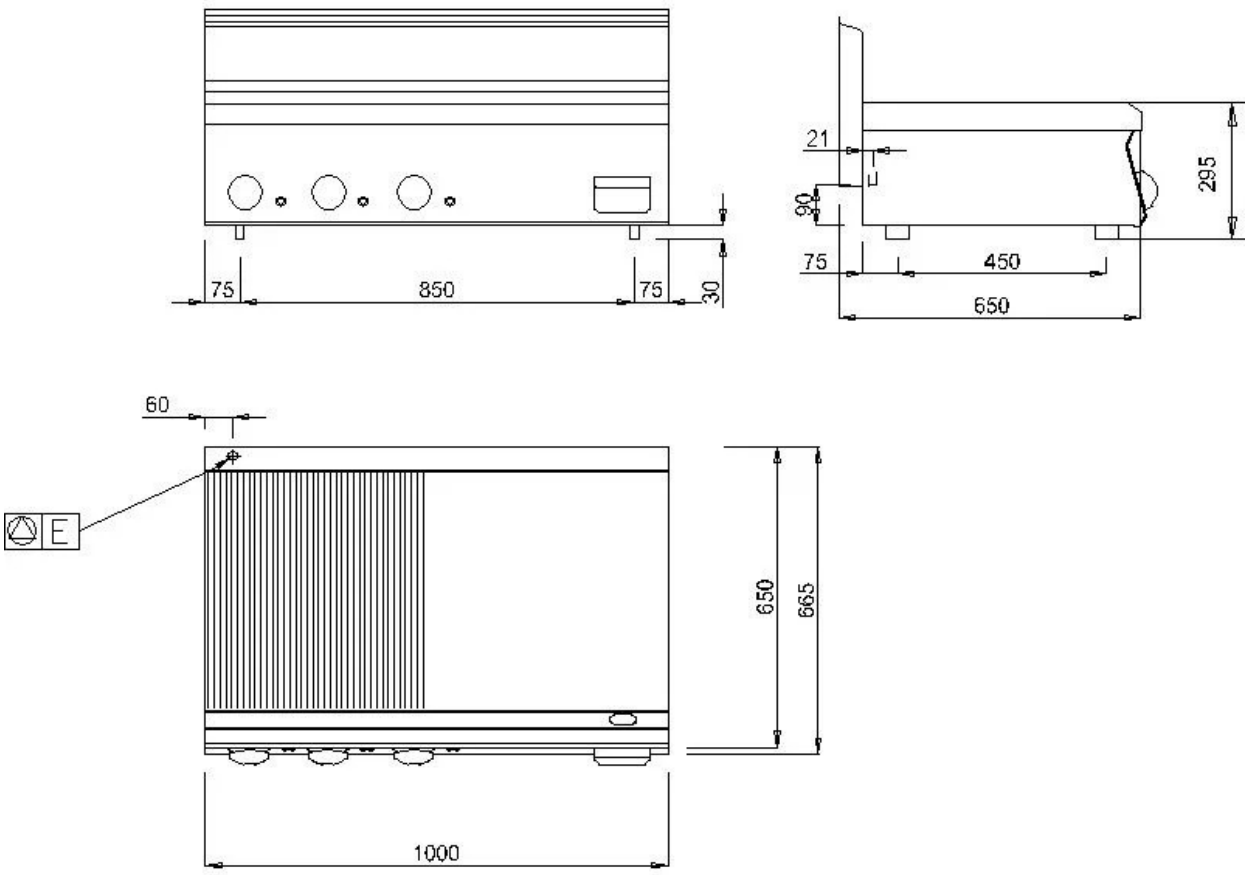

E1	SOCKET	400 V	3N
AF	COLD WATER		
AC	HOT WATER		
G	GAS		
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 10123720962

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 50.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2507533- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it