Data sheet

ECG64F

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**GAS RANGES**	**GAS**	**ECG64F**



DESCRIPTION

GAS RANGE 4 BURNERS ON GAS OVEN

TECHNICAL DATA:

STRUCTURE	ON GAS OVEN
WIDTH	700 mm
DEPHT	650 mm
HEIGHT	850 mm
NET WEIGHT	80 kg
VOLUME	0.73 m3
GAS POWER	23 kW

OVEN POWER	5 kW

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**GAS RANGES**	**GAS**	**ECG64F**

FEATURES:


Monoblock Cooking Range Series SNACK pressed gas cook top for easy cleaning, made of stainless steel AISI 304. 4 waterproof burners with pilot burner and safety thermocouple, 2 x 3.5 kW and 2 x 5,5 kW output. Static gas oven (57x53x29.5h) with thermostatic control valve with temperature setting range from 50°C to 300°C. Burner with stabilized flame incl. pilot flame, safety thermocouple and piezoelectric ignition. Cooking chamber made of stainless steel. Oven bottom AISI 430 th. 30/10. Power rating 5 kW. Appliance with height-adjustable stainless steel feet, thermostatic control valve with temperature setting range from 50°C to 300°C. Burner with stabilized flame incl. safety thermocouple and piezoelectric ignition. Cooking chamber made of stainless steel. Power rating 5 kW. Appliance equipped with height-adjustable stainless steel feet.

OPTIONAL ACCESSORIES:

• STAINLESS STEEL OVEN GRID	C70XGRFVS
• STAINLESS STEEL TRAY	C70XTFVS

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**GAS RANGES**	**GAS**	**ECG64F**

INSTALLATION SCHEME

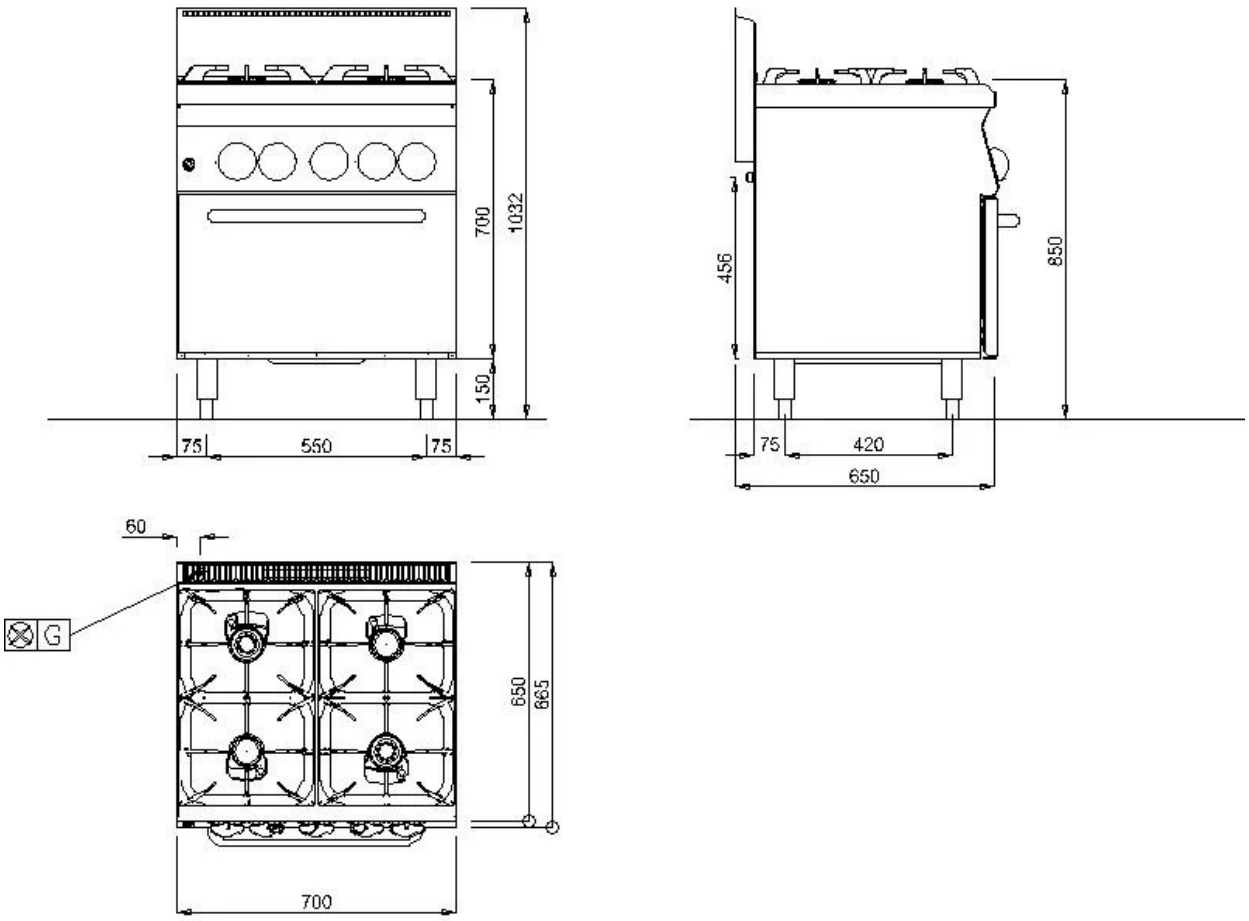

E1	SOCKET		
AF	COLD WATER		
AC	HOT WATER		
G	GAS	Ø 1/2"	0 mm
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it