Data sheet

EDE62120T

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**PASTA COOKER**	**ELECTRIC**	**EDE62120T**

DESCRIPTION

EL. PASTA COOKER 1W-20LT.



TECHNICAL DATA:

STRUCTURE	TOP
WIDTH	400 mm
DEPHT	650 mm
HEIGHT	295 mm
NET WEIGHT	17 kg
VOLUME	0.15 m3
ELECTRIC POWER	5.67 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

WELL CAPACITY	20 LT.

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**PASTA COOKER**	**ELECTRIC**	**EDE62120T**

FEATURES:


Electric pasta-cooker with 20 lt. well. Dimension of the well in cm. 30.8x34x18h. Heating by means of shielded electrical resistances inside the well. Temperature controlled via simmostat and manually resettable safety thermostat. Electrical resistances can be completely lifted for easy cleaning. Equipped with loading/draining tap on the panel, incl. 2 baskets 14.5X29.0X12.5h cm. , sieve bottom and lid in stainless steel

OPTIONAL ACCESSORIES:

• KIT 2 BASKETS FOR PASTA COOKER	CCP4
• STAINLESS STEEL PASTA COOKER BASKET	CCP6
• PASTA COOKER BASKET FOR WELL M40	XPCC623

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**PASTA COOKER**	**ELECTRIC**	**EDE62120T**

INSTALLATION SCHEME

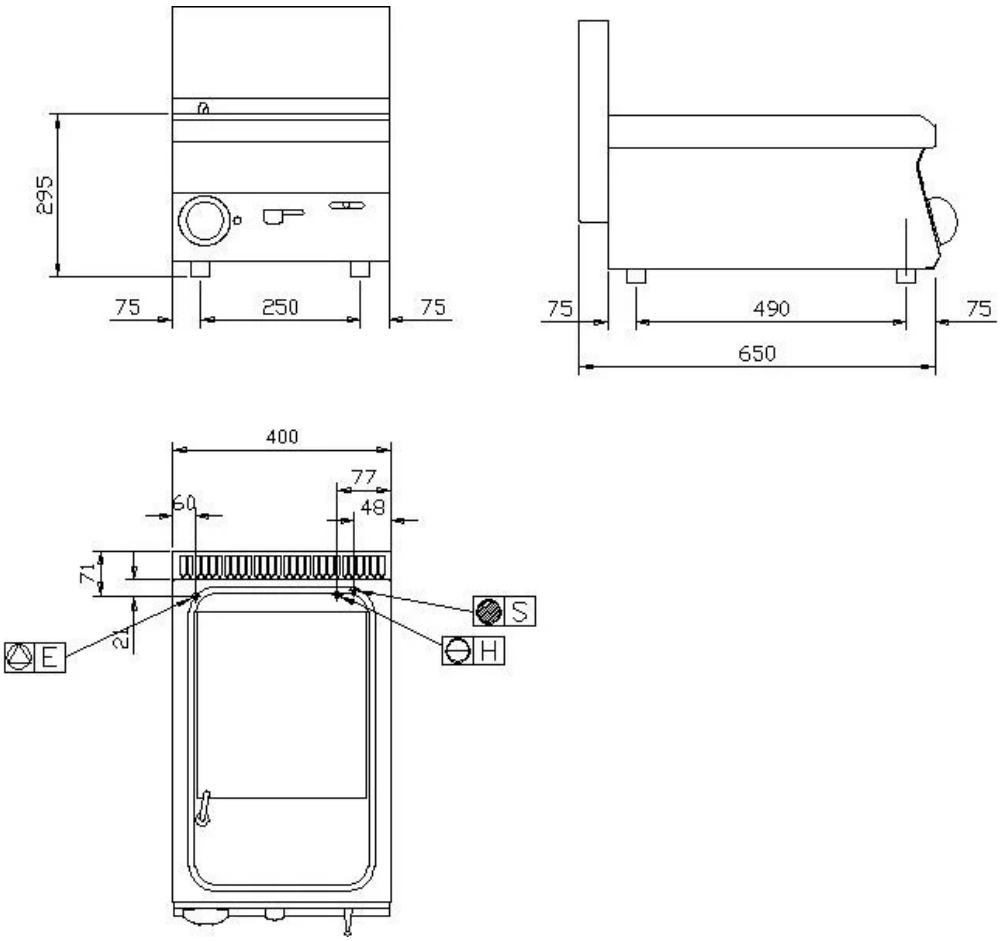

E1	SOCKET	400 V	3N
AF	COLD WATER	Ø 1/2"	608 mm
AC	HOT WATER		
G	GAS		
S	DRAINING	Ø 40MM	400 mm

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it