Data sheet

EFE63210TP

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYER**	**ELECTRIC**	**EFE63210TP**

DESCRIPTION

ELECTRIC FRYER HIGH PERFORMANCE 2 WELLS -10LT.



TECHNICAL DATA:

STRUCTURE	TOP
WIDTH	600 mm
DEPHT	650 mm
HEIGHT	295 mm
NET WEIGHT	33 kg
VOLUME	0.23 m3
ELECTRIC POWER	18 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYER**	**ELECTRIC**	**EFE63210TP**

FEATURES:


Electric Fryer, high performance version, with two pressed wells- 10 lt. each, heating by means of heating elements that can be lifted to make cleaning easier. Equipped with wide cooling area and radiused, tilting oil expansion area. Adjustable thermostat with temperature settings between 100°C and 180°C, manually resettable safety thermostat. Signal lamp to check on power supply and resistance operation. Removable filter and lid included.

OPTIONAL ACCESSORIES:

• BASKET 1 MODULE for electric Fryer (10 Lt)	NC-1M
• KIT 2 BASKET 1/2 MODULE FOR ELECTRIC FRYERS (8-10 lt)	NC-1/2M

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYER**	**ELECTRIC**	**EFE63210TP**

INSTALLATION SCHEME

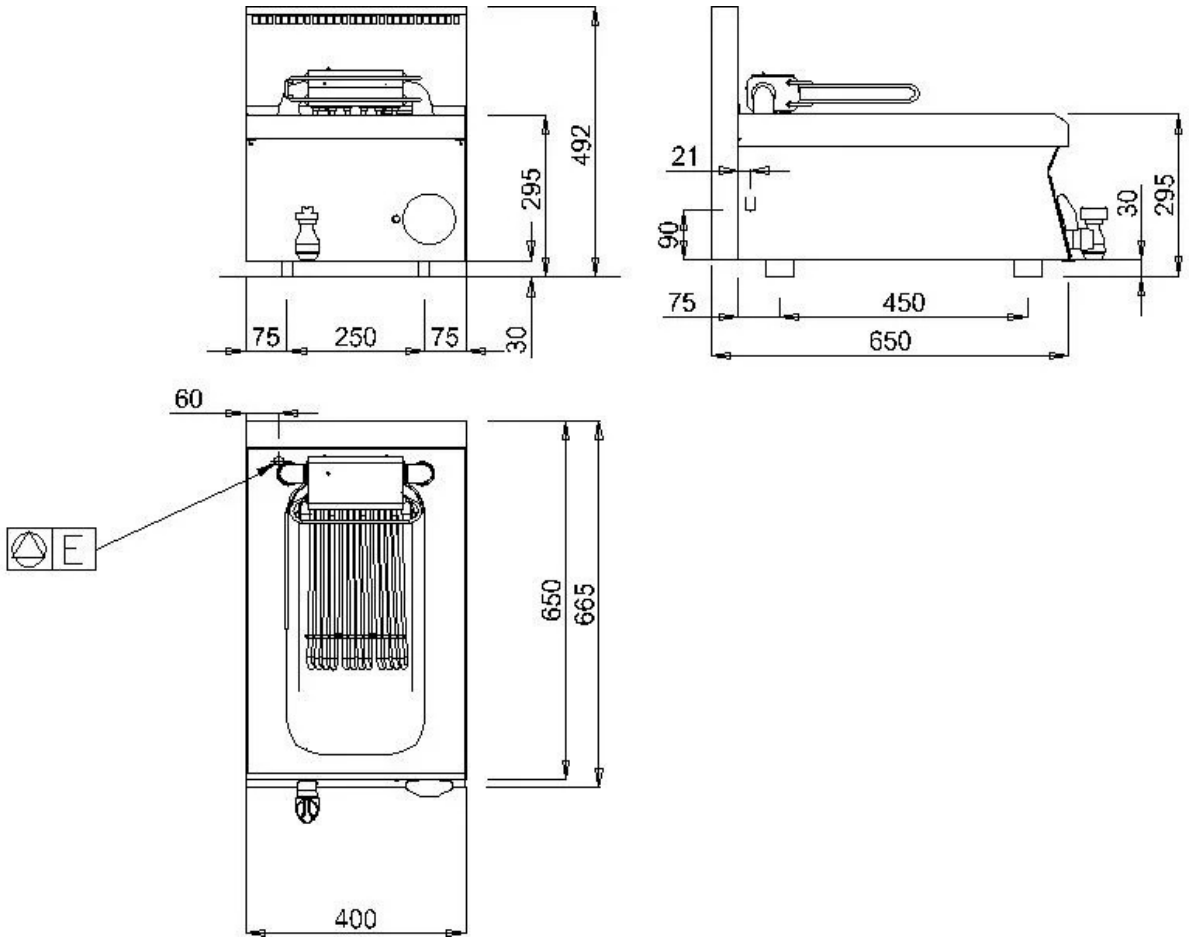

E1	SOCKET	400 V	3N
AF	COLD WATER		
AC	HOT WATER		
G	GAS		
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it