Data sheet

EFG63208T

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYER**	**GAS**	**EFG63208T**

DESCRIPTION

GAS FRYER 2 WELLS - 8LT.



TECHNICAL DATA:

STRUCTURE	TOP
WIDTH	600 mm
DEPHT	650 mm
HEIGHT	295 mm
NET WEIGHT	44 kg
VOLUME	0.23 m3
GAS POWER	14 kW

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYER**	**GAS**	**EFG63208T**

FEATURES:


Gas Fryer with 2 pressed 8 lt. wells, wide cooling area and ribbed, tilted oil expansion area. Heating by means of stainless steel burners with optimized flame, positioned outside the well, incl. pilot flame and safety thermocouple. Gas supply controlled by thermostatic valve, and manually resettable safety thermostat. Piezoelectric ignition located on the control panel. Removable filter and lid included. Well size in cm. 24x42. controlled by thermostatic valve, and manually resettable safety thermostat. Extractable filter, basket and lid and collector for drain cock included.

OPTIONAL ACCESSORIES:

• BASKET 1 MODULE for electric Fryer (10 Lt)	NC-1M
• KIT 2 BASKET 1/2 MODULE FOR GAS FRYERS (8 lt)	C-1/2M

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	FRYER	GAS	EFG63208T

INSTALLATION SCHEME

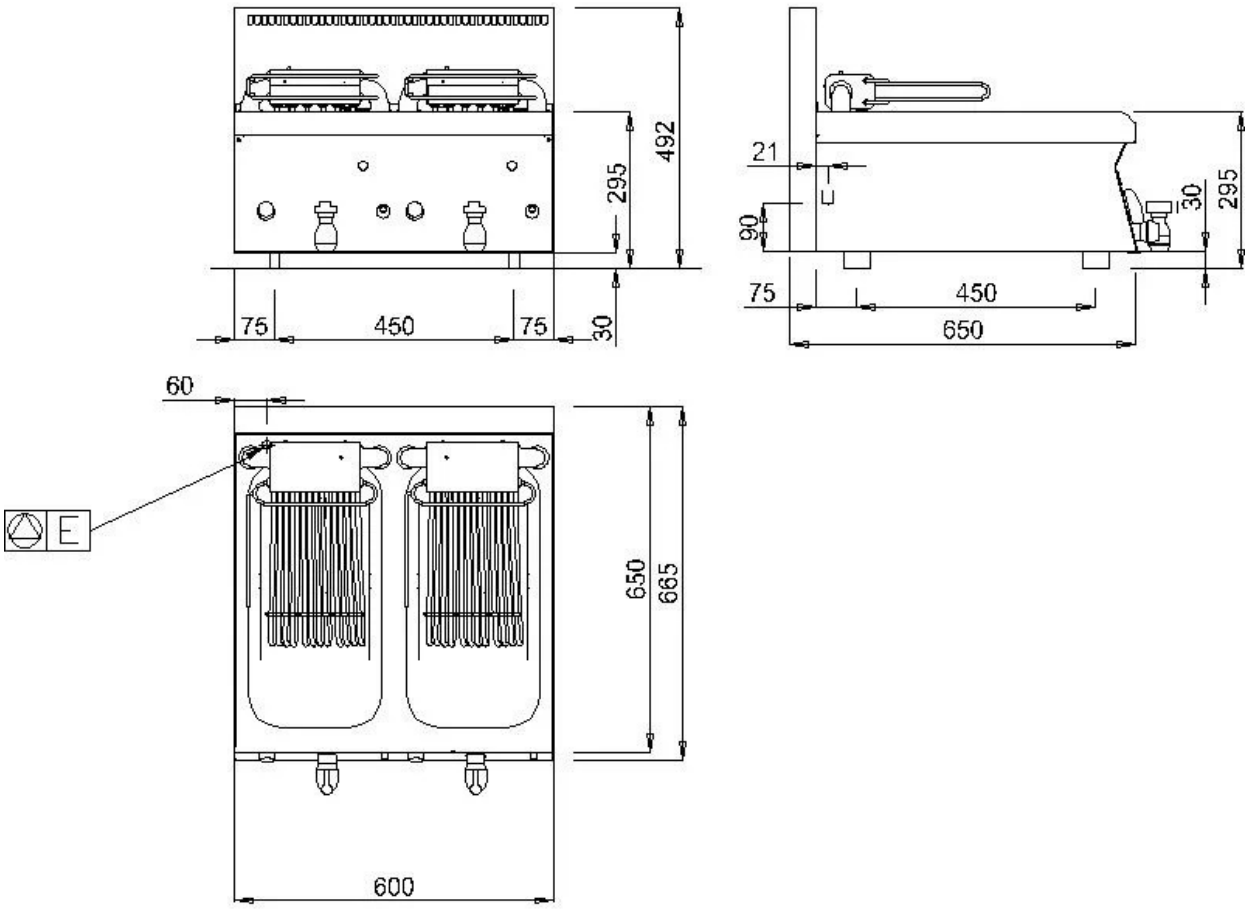

E1	SOCKET		
AF	COLD WATER		
AC	HOT WATER		
G	GAS	Ø 1/2"	0 mm
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it