Data sheet

FELBS2

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYER**		**FELBS2**



DESCRIPTION

LITEBITE FRYER DOUBLE BASKET

TECHNICAL DATA:

STRUCTURE	COUNTERTOP
WIDTH	540 mm
DEPHT	660 mm
HEIGHT	810 mm
NET WEIGHT	40 kg
VOLUME	0.25 m3
ELECTRIC POWER	3 kW
FREQUENCY	50 Hz
VOLTAGE	220 V

WELL CAPACITY	14 Lt.

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYER**		**FELBS2**


FEATURES:

Electric countertop fryer with a single well.
With its 14-liter well, it enables fast frying without temperature drops. Primarily designed for single portions, it can also fry larger portions using a single basket. Heating is achieved with in-tank elements for increased efficiency. The activation of the heating is indicated by a green warning light located on the control panel. Intuitive electronic controls. Maximum production capacity per cycle – 400 g per side (800 g total). Hourly production of 16 kg. Cooking tank in AISI 304 stainless steel, with an 14-liter capacity. The tank has a wide front area for oil and foam expansion. The oil temperature in the tank is controlled by a mechanical thermostat, adjustable up to 185 °C. Draining and extraction processes are done manually via the tap located on the front of the machine. External filtration system in a dedicated tank with a special filter.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYER**		**FELBS2**

INSTALLATION SCHEME

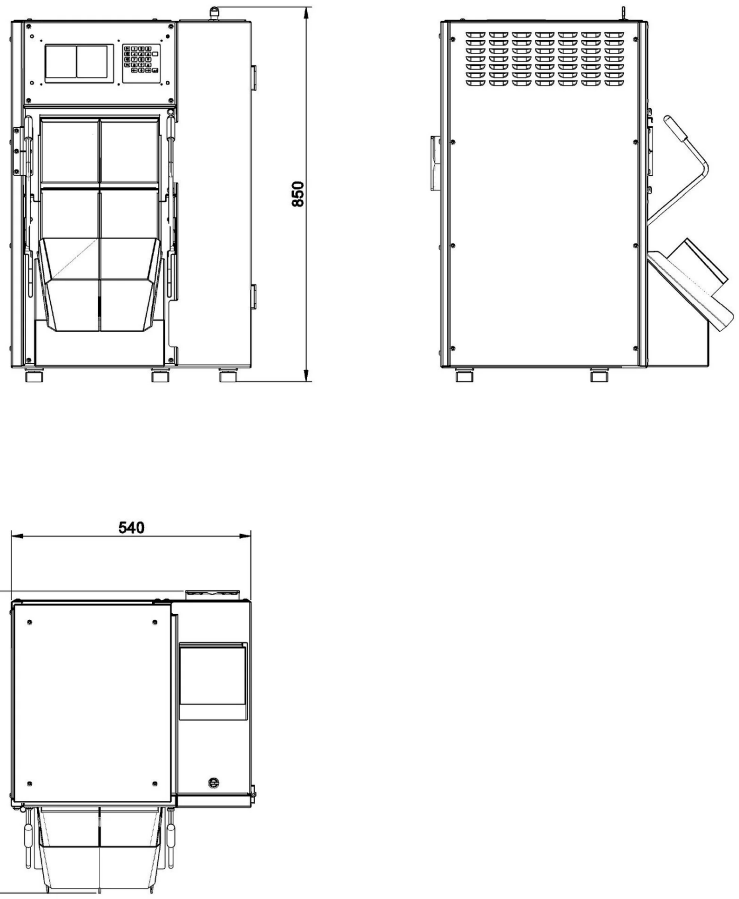

E1	SOCKET	220 V
AF	COLD WATER	
AC	HOT WATER	
G	GAS	
S	DRAINING	

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it