Data sheet

# NECG76G

| SERIES | PRODUCT FAMILY | VERSION | MODEL |
|---|---|---|---|
| **700** | **GAS RANGES** | **GAS** | **NECG76G** |

## DESCRIPTION

GAS RANGE 6 BURNERS ON OPEN MODULE



## TECHNICAL DATA:

| | |
|---|---|
| STRUCTURE | OPEN BASE |
| WIDTH | 1200 mm |
| DEPHT | 730 mm |
| HEIGHT | 900 mm |
| NET WEIGHT | 85 kg |
| VOLUME | 0.76 m3 |
| GAS POWER | 36 kW |

| | |
|---|---|
| NR. COOKING ZONES | 6 |

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

| SERIES | PRODUCT FAMILY | VERSION | MODEL |
|---|---|---|---|
| **700** | **GAS RANGES** | **GAS** | **NECG76G** |

## FEATURES:


Gas Range 6 burners, Monoblock unit on open base. Pressed cook top made of stainless steel AISI 304, thickness 15/10, pre-fitted for head-to head connection. Standard device with 6 main burners, max. output 6 kW, hermetically sealed to top. Constant power adjustment within a range of 1.6 to 6 kW via safety tap with thermocouple. Ignition of the main burner via a steady low-consumption pilot burner (170 W). The pilot burner and thermocouple are placed underneath the main burner body to provide protection against accidental impacts and spills. Top with radiused corners for easy cleaning, equipped with RAAF enamelled cast iron grids (acid, alkali and flame resistant). Height-adjustable feet in stainless steel.

## OPTIONAL ACCESSORIES:

| | |
|---|---|
| • ELECTRIC IGNITION KIT | EXACEL6 |
| • KIT WATER LOAD / DRAIN ON BURNER SUPPORT BASIN | EXSCA6 |
| • CAST IRON GRID | EGG7 |
| • STAINLESS STEEL GRID | EGT7 |
| • RIBBED HOTPLATE | EGHR7 |
| • SMOOTH HOTPLATE | EGHL7 |

| SERIES | PRODUCT FAMILY | VERSION | MODEL |
|---|---|---|---|
| **700** | **GAS RANGES** | **GAS** | **NECG76G** |

## INSTALLATION SCHEME

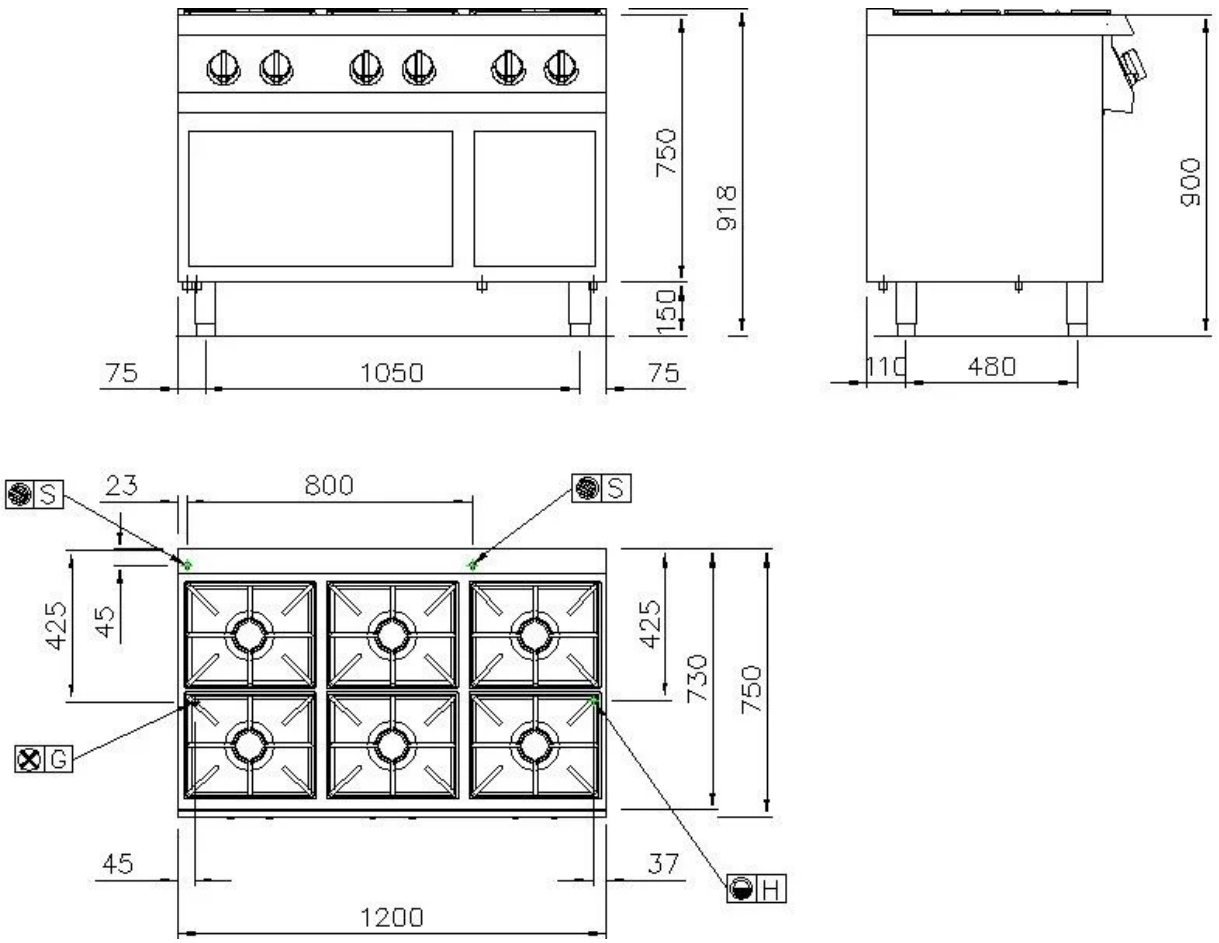


| | | | |
|---|---|---|---|
| E1 | SOCKET | | |
| AF | COLD WATER | Ø 1/2" | 100 mm |
| AC | HOT WATER | | |
| G | GAS | Ø 1/2" | 100 mm |
| S | DRAINING | Ø 40mm N°2 | 0 mm |

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght ( except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it