Data sheet

# NECIT92GE

| SERIES | PRODUCT FAMILY | VERSION | MODEL |
|---|---|---|---|
| **900** | **INDUCTION PLATE** | **ELECTRONIC** | **NECIT92GE** |



## DESCRIPTION

ELECTRONIC INDUCTION RANGE FULL COVERAGE
2 ZONES ON OPEN MODULE

## TECHNICAL DATA:

| | |
|---|---|
| STRUCTURE | OPEN BASE |
| WIDTH | 400 mm |
| DEPHT | 900 mm |
| HEIGHT | 900 mm |
| NET WEIGHT | 0 kg |
| VOLUME | 0.5 m3 |
| ELECTRIC POWER | 14 kW |
| PHASE | 3 |
| FREQUENCY | 50/60 Hz |
| VOLTAGE | 400 V |

| | |
|---|---|
| PLATE SIZE | 350x700 mm |
| NR. COOKING ZONES | 2 |

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

| SERIES | PRODUCT FAMILY | VERSION | MODEL |
|---|---|---|---|
| **900** | **INDUCTION PLATE** | **ELECTRONIC** | **NECIT92GE** |


## FEATURES:

Electronic Induction Range Full Coverage, Monoblock unit on open base. Top plate in stainless steel AISI 304, thickness 20/10, pre-fitted for head-to-head connection, ceramic top thickness 6 mm sealed to the top plate, the pot detection system activates heating as soon as a cooking pot is placed upon the cook top. Equipped with 2 independent cooking zones of 7 kW output. Cooking zones are framed by silkscreened circles on the ceramic surface. Control and operational settings via backlit computer with touch technology, black musk. Temperature setting with 10 power levels, three timers integrated with buzzer and auto shut off to decrease power consumption, standby function with adjustable set point, audible and visual signals for set timings and temperatures, temperature also displayed when appliance is turned off, auto diagnose system to check that appliance is operating correctly and low voltage digital inputs to optimize power consumption. Incorporated Power-Box, main safety sensor. Height-adjustable feet in stainless steel.

## OPTIONAL ACCESSORIES:

| SERIES | PRODUCT FAMILY | VERSION | MODEL |
|---|---|---|---|
| **900** | **INDUCTION PLATE** | **ELECTRONIC** | **NECIT92GE** |

## INSTALLATION SCHEME

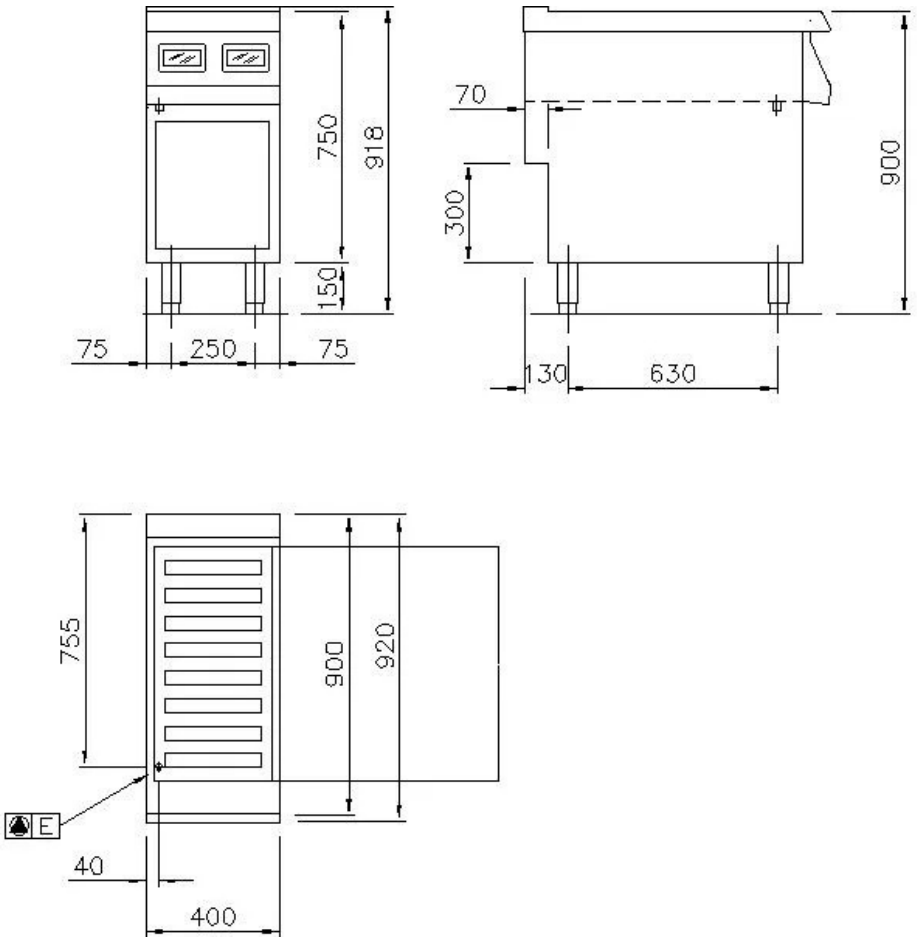


| | | | |
|---|---|---|---|
| E1 | SOCKET | 400 V | 3 |
| AF | COLD WATER | | |
| AC | HOT WATER | | |
| G | GAS | | |
| S | DRAINING | | |

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght ( except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it