Data sheet

NECV74E

SERIES	PRODUCT FAMILY	MODEL
700	**CERAMIC PLATE**	**NECV74E**



DESCRIPTION

ELECTRIC RANGE CERAMIC TOP 4 ZONES ON ELECTRIC OVEN

TECHNICAL DATA:

STRUCTURE	ON ELECTRIC OVEN
WIDTH	800 mm
DEPHT	730 mm
HEIGHT	900 mm
NET WEIGHT	90 kg
VOLUME	0.5 m3
ELECTRIC POWER	16 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

PLATE SIZE	750x570 mm
OVEN CAPACITY	GN 2/1
OVEN POWER	6 kW
NR. COOKING ZONES	4
OVEN INTERNAL DIMENSIONS	575x650x300 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	MODEL
700	**CERAMIC PLATE**	**NECV74E**

FEATURES:


Electric Range with ceramic cook top, Monoblock unit on electric oven. Stainless steel top (AISI 304) thickness 15/10, pre-fitted for head-to-head connection. Equipped with 4 independent cooking zones, each one with 2,5 kW output, controlled via power regulator. Ceramic top, thickness 6 mm, sealed to the top plate. Max. temperature 400°C in 3 minutes. Dimensions of the hotplate in cm 75x70. The cooking zones are framed by silkscreened circles on the ceramic surface and equipped with a signal light for residual heat. Signal light checks whether the appliance is operating correctly. Electric static oven GN 2/1. Heating by means of by independently controlled top and bottom heating elements. Thermostat to adjust the temperature within a setting range from 50°C to 300°C. Cooking chamber made of stainless steel, dimensions in cm 57.5x70x30h. Cast iron oven bottom. Inner door made of stainless steel with labyrinth seal. 4-position selector switch, safety thermostat. Signal light to check whether the appliance is operating correctly. Power rating 6 kW. Appliance equipped with height-adjustable stainless steel feet.

OPTIONAL ACCESSORIES:

• BACKING TRAY	ELBF
• OVEN GRID GN 2/1	GF21

SERIES	PRODUCT FAMILY	MODEL
700	**CERAMIC PLATE**	**NECV74E**

INSTALLATION SCHEME

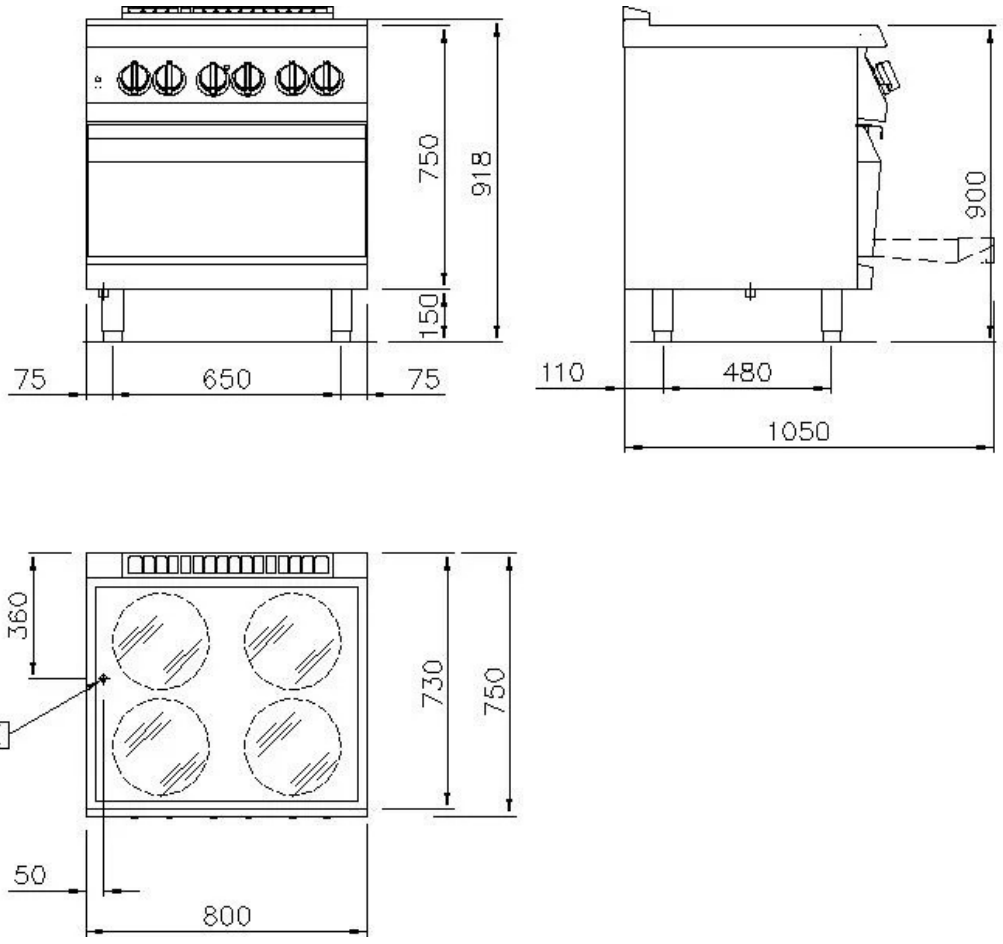

E1	SOCKET	400 V	3N
AF	COLD WATER		
AC	HOT WATER		
G	GAS		
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it