Data sheet

NEDE94242

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**PASTA COOKER**	**ELECTRIC**	**NEDE94242**



DESCRIPTION

ELECTRIC PASTA COOKER 2 WELLS 42+42 LT.

TECHNICAL DATA:

STRUCTURE	FLOOR
WIDTH	800 mm
DEPHT	900 mm
HEIGHT	900 mm
NET WEIGHT	95 kg
VOLUME	0.9 m3
ELECTRIC POWER	17 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

WELL CAPACITY	42 LT.
WELL DIMENSIONS	305x510x285 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it


SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**PASTA COOKER**	**ELECTRIC**	**NEDE94242**

FEATURES:

Electric Pasta-cooker, double well, Monoblock unit on closed cupboard. Pressed stainless steel cook top (AISI 304), top thickness 20/10 with spillage basin and wide foam expansion area, pre-fitted for head-to-head connection. Pressed stainless steel wells (AISI 316), polished with radiused corners for easy cleaning. Water is loaded via electric valve activated by using the switch on the control panel. Fast filling and top-up options. Pressure switch prevents heating if well is empty. Fixed stainless steel water tap positioned underneath the dripping plate. Heating by means of shielded electrical resistances positioned inside the well to improve output, the tilting mechanism makes well cleaning easier. Heating controlled by means of power regulator in order to make the boiling process more efficient. Equipped with manually resettable safety thermostat. Well capacity 42+42 lt. Dimensions of the well in cm. 30.5x51x28.5h. Water drainage via handle positioned on the base unit. Height-adjustable feet in stainless steel. SUPPLIED WITHOUT BASKETS AND LID.

OPTIONAL ACCESSORIES:

• BASKET 1/3 FOR PASTA COOKER - SIDE HANDLES	SXPCL13
• KIT 2 BASKETS 1/3 FOR PASTA COOKER - COMPLETE WITH FRAME	SXPCKF913
• KIT MADE OF 2 BASKETS WITH FRAME	SXPCF16
• BASKET 2/3 PASTA COOKER WITH LATERAL SUPPORT	SXPCC23
• BASKET 1/1 PASTA COOKER	SXPCC11
• BASKET 1/2 PASTA COOKER	SXPCC12
• LID FOR PASTA COOKER	SXPCC9
• KIT OF 3 SINGLE SERVING BASKETS INCL. FRAME FOR 28 AND 42 LT WELL	SXPC3MP

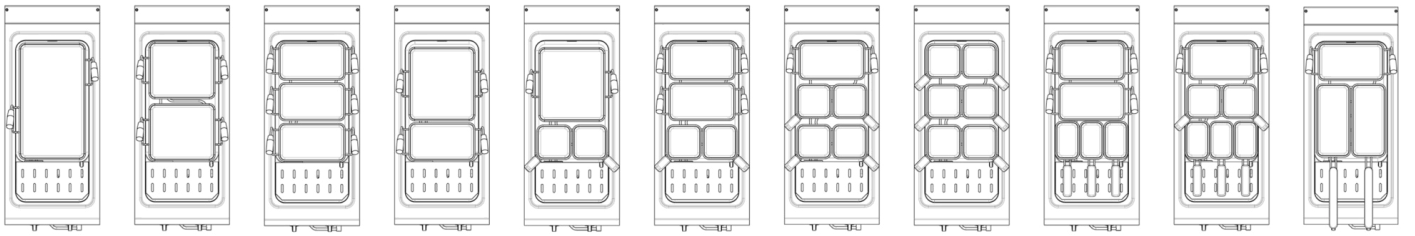

SXPCC11 | 2x SXPCC12 | 3x SXPCL13 | 1x SXPCC23 1x SXPCL13 | 1x SXPCC23 1x SXPCF16 | 2x SXPCL13 1x SXPCF16 | 1x SXPCL13 2x SXPCF16 | 3x SXPCF16 | 2x SXPCL13 1x SXPC3MP | 1x SXPCL13 1x SXPCF16 1x SXPC3MP | 1x SXPCL13 1x SXPCKF913


SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967


Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**PASTA COOKER**	**ELECTRIC**	**NEDE94242**

INSTALLATION SCHEME

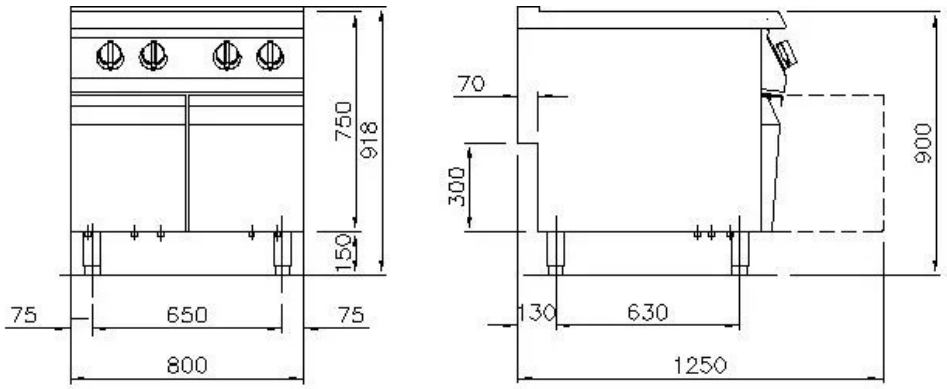

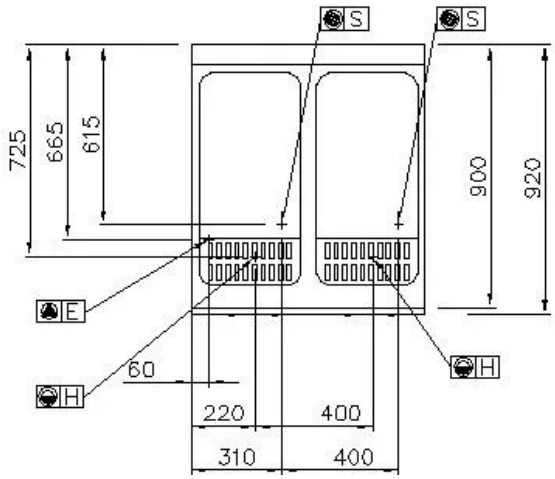

E1	SOCKET	400 V	3N
AF	COLD WATER	Ø 3/4" n°2	100 mm
AC	HOT WATER		
G	GAS		
S	DRAINING	Ø 1" N°2	0 mm

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it