Data sheet

NEFE74215

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**FRYER**	**ELECTRIC**	**NEFE74215**

DESCRIPTION

ELECTRIC FRYER 2 WELLS 15+15 LT.



TECHNICAL DATA:

STRUCTURE	FLOOR
WIDTH	800 mm
DEPHT	730 mm
HEIGHT	900 mm
NET WEIGHT	75 kg
VOLUME	0.5 m3
ELECTRIC POWER	24 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

WELL CAPACITY	15 LT.
WELL DIMENSIONS	250x318x525 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**FRYER**	**ELECTRIC**	**NEFE74215**

FEATURES:


Electric Fryer, double well, Monoblock unit on cupboard with hinged door. Cook top made of stainless steel AISI 304, thickness 15/10, pre-fitted for head-to head connection. Pressed wells made of stainless steel AISI 304, with radiused inner profile. Well capacity in litres 15+15. Wells with wide expansion area in the front part for oil and foam and extended cooling area in the front part for collection of food particles. Heating by means of shielded electrical resistance in stainless steel AISI 304 positioned inside the well. The resistances rotates over 90° to make cleaning procedures easier. An orange signal light on the control panel signals that heating has been activated. Oil temperature inside the well controlled via mechanical thermostat, with a setting range between 100 and 185 °C. Manually resettable safety thermostat. Extractable filter, basket and lid and collector for drain cock included. Height-adjustable feet in stainless steel.

OPTIONAL ACCESSORIES:

• OIL DRIP TRAY	EBAC7
• COLLECTOR FOR FRYING RESIDUE	NXFIV15G
• 1/2 basket for 15 liters tank capacity	ECF15M

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**FRYER**	**ELECTRIC**	**NEFE74215**

INSTALLATION SCHEME

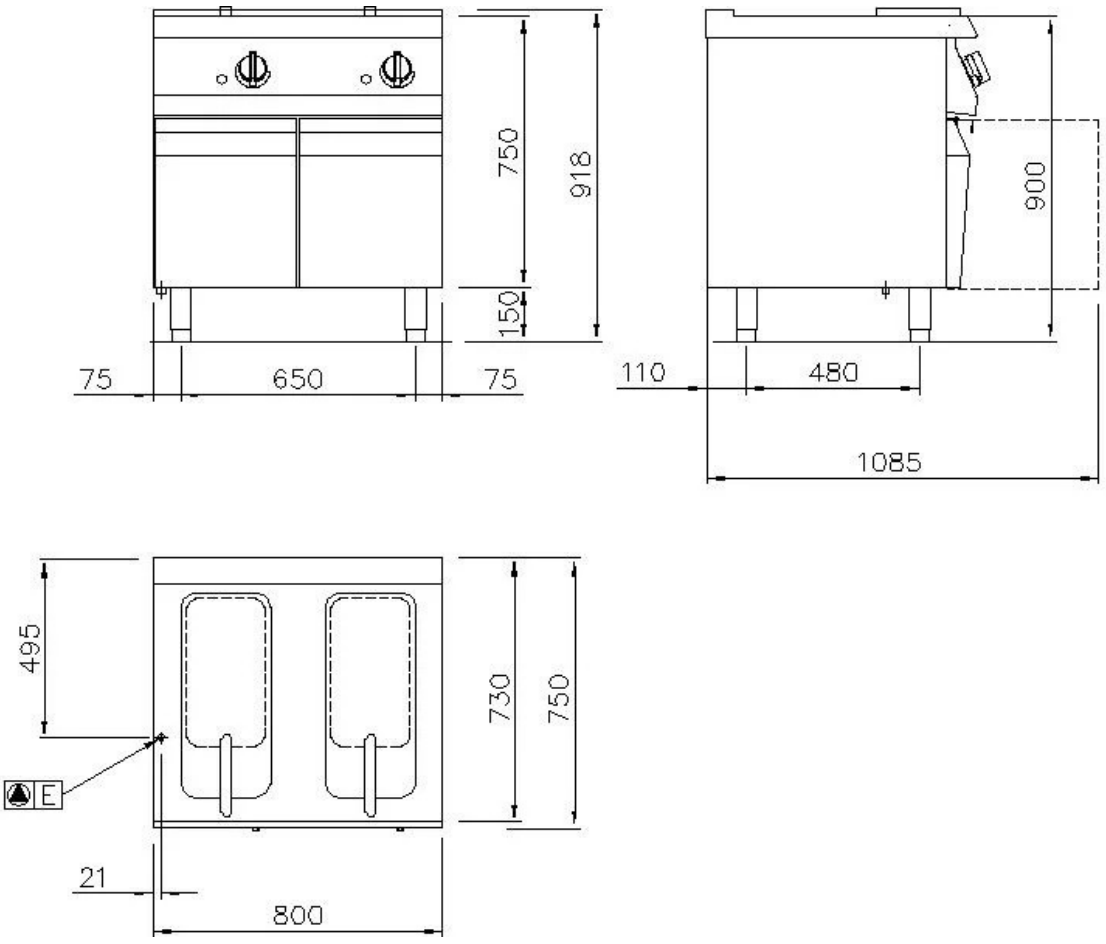

E1	SOCKET	400 V	3N
AF	COLD WATER		
AC	HOT WATER		
G	GAS		
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it