Data sheet

NEGL74G

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**GRILL**	**GAS**	**NEGL74G**

DESCRIPTION

LAVA ROCK GAS GRILL 80 CM ON OPEN MODULE



TECHNICAL DATA:

STRUCTURE	OPEN BASE
WIDTH	800 mm
DEPHT	730 mm
HEIGHT	900 mm
NET WEIGHT	85 kg
VOLUME	0.5 m3
GAS POWER	20 kW

NR. COOKING ZONES	2
GRILL DIMENSIONS	390x485 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**GRILL**	**GAS**	**NEGL74G**

FEATURES:


Gas Lava Rock Grill, Monoblock unit on open base. Stainless steel top (AISI 304), thickness 15/10, pre-fitted for head-to-head connection. Heating by means of steel burners and stabilized flame incl. pilot burner and safety thermocouple. Two independent cooking zones. Gas supply by safety valve tap. The cooking grid can be positioned on two levels to optimize grilling. Removable grease tray for easy cleaning. Rod grill included. Height-adjustable feet in stainless steel.

OPTIONAL ACCESSORIES:

• KIT CAST IRON GRID FOR 800 MM MODULE	GGL74
• Kit 6 KG PACKAGE OF LAVA ROCKS	ERL

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**GRILL**	**GAS**	**NEGL74G**

INSTALLATION SCHEME

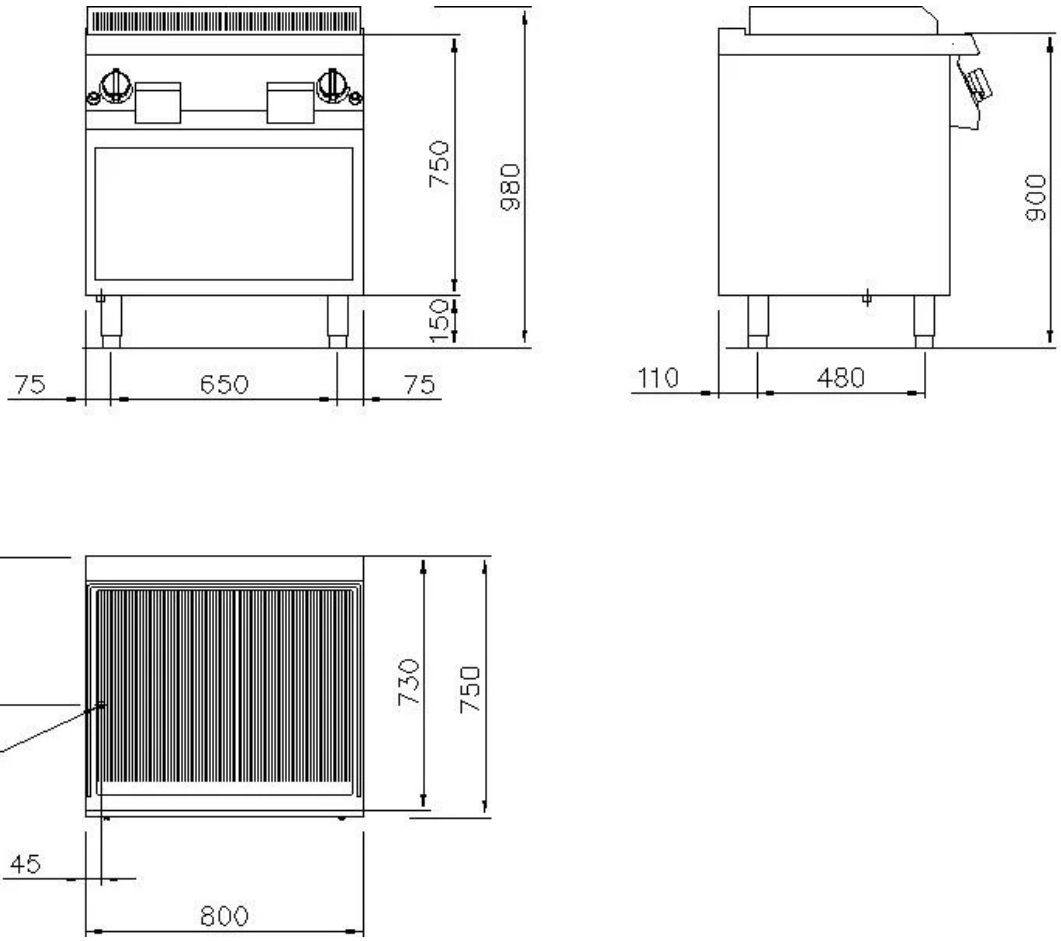

E1	SOCKET		
AF	COLD WATER		
AC	HOT WATER		
G	GAS	Ø 1/2"	100 mm
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it