Data sheet

NEGVG74

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**GRILL**	**GAS**	**NEGVG74**



DESCRIPTION

GAS GRILL 80 CM

TECHNICAL DATA:

STRUCTURE	FLOOR
WIDTH	800 mm
DEPHT	730 mm
HEIGHT	900 mm
NET WEIGHT	100 kg
VOLUME	0.5 m3
GAS POWER	15 kW

NR. COOKING ZONES	2
GRILL DIMENSIONS	640x465 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**GRILL**	**GAS**	**NEGVG74**


FEATURES:

Gas Grill Monoblock unit, two independent cooking zones. Stainless steel top (AISI 304), thickness 15/10, pre-fitted for head-to-head connection. Reversible cast iron grid. Tilting forward for cooking fatty meats, with 4 mm elements in direct contact and drip tray for collecting grease. Horizontal grid for fish and vegetables, elements with circular design diam. 10 mm. Splashback up-stand on three sides, height 13.5 cm, made of stainless steel AISI 304. Fat drain channel in the front, easily removable for cleaning. Removable tray for grease and water positioned underneath the heating elements. The water cools the cooking fats and by evaporating it cooks the foods smoothly. Control unit placed on the fixed front panel. Heating by means of stainless steel burners (Aisi 304) placed under the cooking grid, protected by a stainless steel diffuser (Aisi 316), easily removable for cleaning. Heat adjustment via safety taps with thermocouple and pilot burner. Piezoelectric ignition. Height-adjustable feet in stainless steel. Scraper for grid included.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**GRILL**	**GAS**	**NEGVG74**

INSTALLATION SCHEME

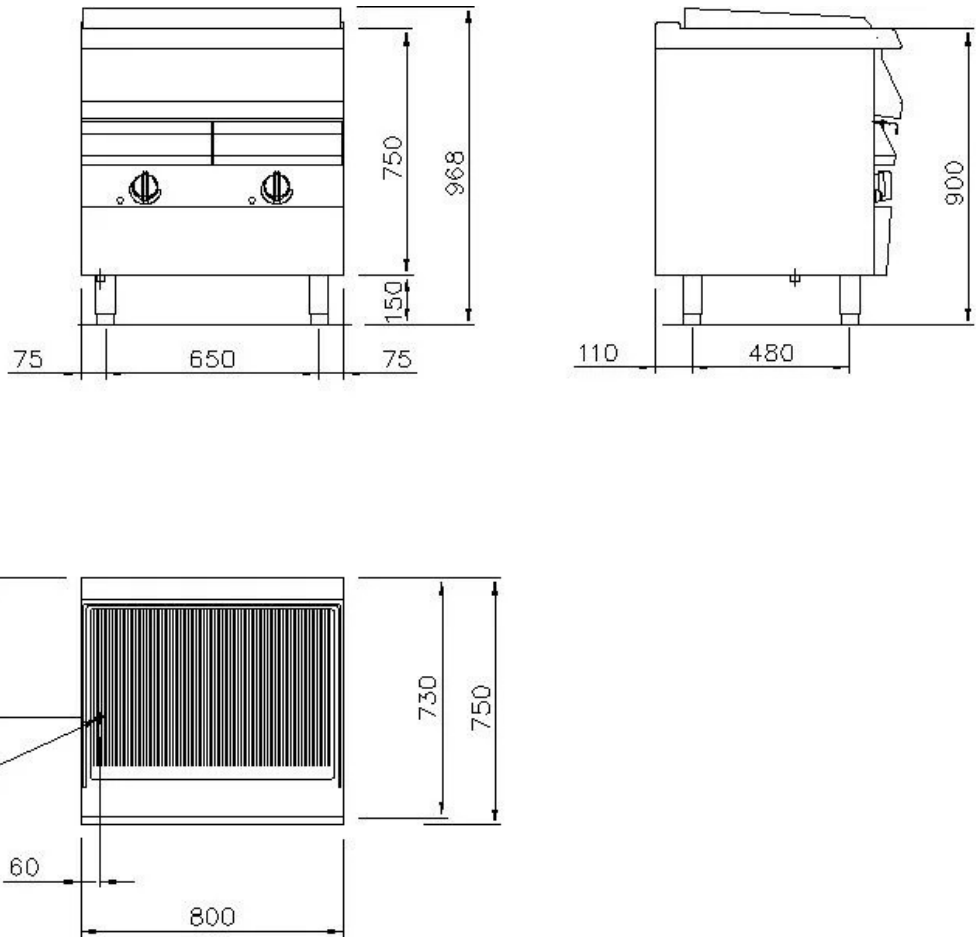

E1	SOCKET		
AF	COLD WATER		
AC	HOT WATER		
G	GAS	Ø 1/2"	100 mm
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it