Data sheet

NEGVG96G

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**GRILL**	**GAS**	**NEGVG96G**

DESCRIPTION

GAS GRILL 120 CM ON OPEN BASE



TECHNICAL DATA:

STRUCTURE	OPEN BASE
WIDTH	1200 mm
DEPHT	900 mm
HEIGHT	900 mm
VOLUME	0.9 m3
GAS POWER	32 kW

NR. COOKING ZONES	4
GRILL DIMENSIONS	530x1085 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**GRILL**	**GAS**	**NEGVG96G**


FEATURES:

Gas Grill, Monoblock unit on open base, four independent cooking zones. Stainless steel top (AISI 304) thickness 20/10, pre-fitted for head-to-head connection. Reversible cast iron grid. Tilting forward for cooking fatty meats, with 4 mm elements in direct contact and drip tray for collecting grease. Horizontal grid for fish and vegetables, elements with circular design diam. 10 mm. Splashback up-stand on three sides, made of stainless steel AISI 304. Large fat collection gutter; easy to clean with 3 holes in diameter 40mm. through which the fat drains into the removable collection tray underneath the heating elements. Heating by means of 8 high performance cast iron burners positioned underneath the cooking grid. Each burner is provided with two flame rows and thanks to the upper cast iron diffuser the highest thermal flywheel is provided, all components are easily removable for cleaning. Temperature setting via 4 valve taps incl. safety thermocouple and pilot burner. Battery-powered electric ignition. Height-adjustable feet in stainless steel. Scraper for grid included.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**GRILL**	**GAS**	**NEGVG96G**

INSTALLATION SCHEME

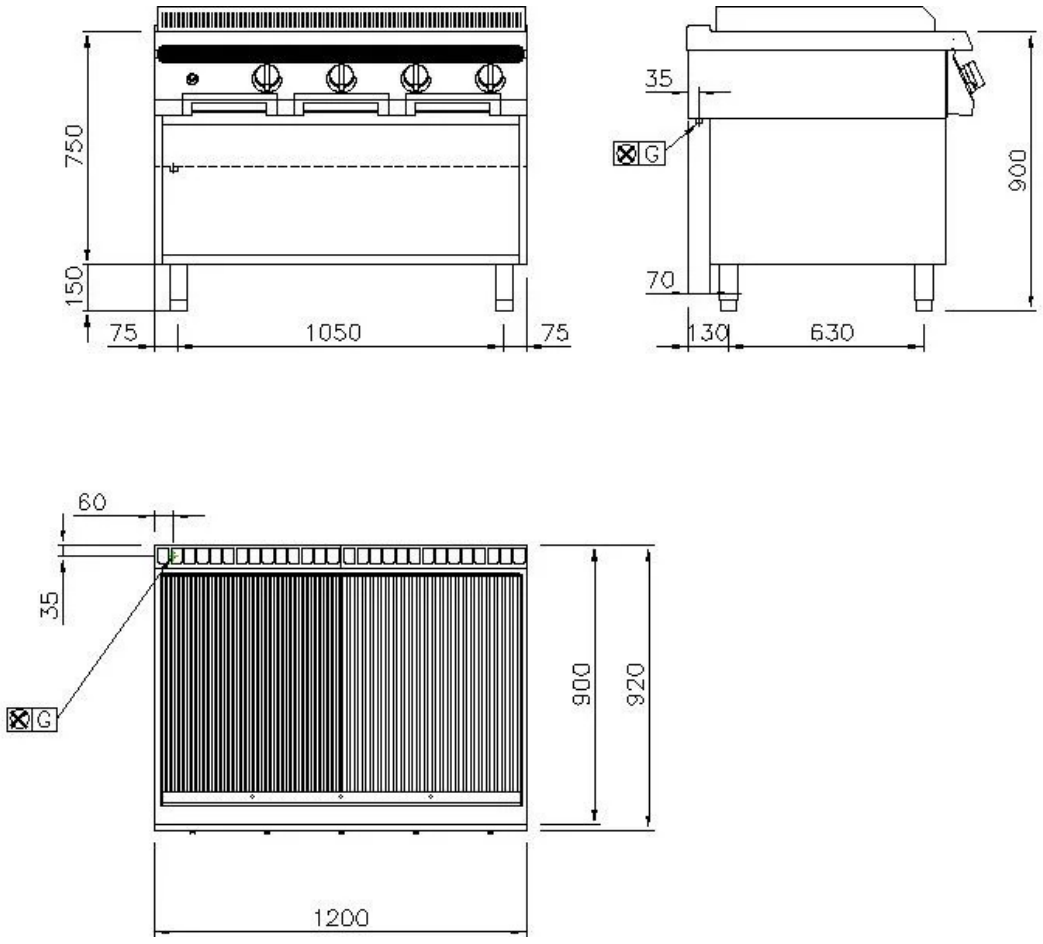

E1	SOCKET		
AF	COLD WATER		
AC	HOT WATER		
G	GAS	Ø 1/2"	100 mm
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it