Data sheet

NEGVRE92T

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**GRILL**	**ELECTRIC**	**NEGVRE92T**

DESCRIPTION

ELECTRIC GRILL 40 CM TOP VERSION



TECHNICAL DATA:

STRUCTURE	TOP
WIDTH	400 mm
DEPHT	900 mm
HEIGHT	320 mm
NET WEIGHT	30 kg
VOLUME	0.4 m3
ELECTRIC POWER	5.41 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

GRILL DIMENSIONS	270x640 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**GRILL**	**ELECTRIC**	**NEGVRE92T**

FEATURES:


Electric Grill, one cooking zone. Stainless steel top (AISI 304) thickness 20/10, pre-fitted for head-to-head connection. Reversible cast iron grid. Tilting forward for cooking fatty meats, with 4 mm elements in direct contact and drip tray for collecting grease. Horizontal grid for fish and vegetables, elements with circular design diam. 10 mm. Splashback up-stand on three sides, height 13.5 cm, made of stainless steel AISI 304. Fat drain channel in the front, easily removable for cleaning. Removable tray for grease and water positioned underneath the heating elements. Grease is cooled down by water. The water then evaporates and cooks the food gently. Control unit placed on the fixed front panel. Heating by means of shielded electrical Incoloy resistances placed underneath the cooking grid, protected by a stainless steel diffuser (Aisi 316), easily removable for cleaning. Activation and set up of the heating process via thermostat. An orange signal light appears when the appliance is turned on and operating. Height-adjustable feet in stainless steel. Scraper for grid included.

OPTIONAL ACCESSORIES:

• CAST IRON GRID KIT FOR 400 MM MODULE	GGL92

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**GRILL**	**ELECTRIC**	**NEGVRE92T**

INSTALLATION SCHEME

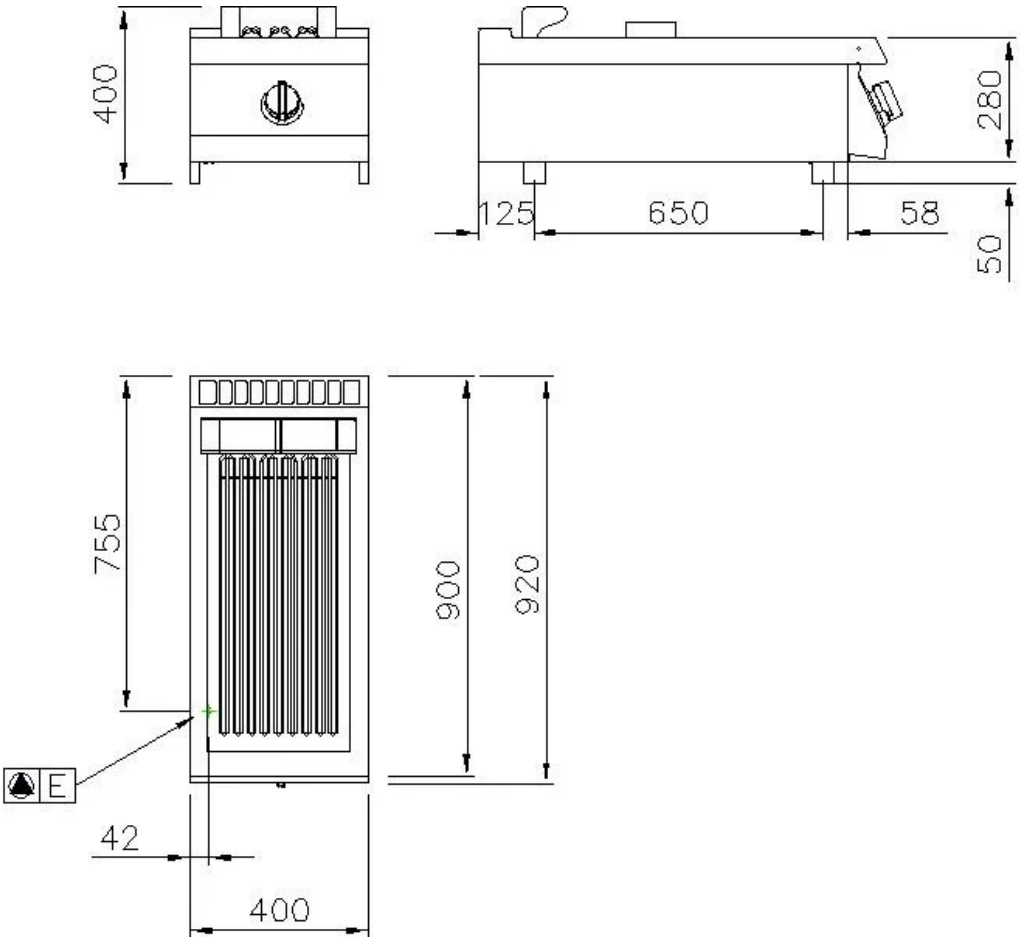

E1	SOCKET	400 V	3N
AF	COLD WATER		
AC	HOT WATER		
G	GAS		
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it