Data sheet

NEPE9I15E

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**PANS**	**ELECTRONIC**	**NEPE9I15E**

DESCRIPTION

ELECTRONIC PAN INDIRECT HEATING 150 LITRES



TECHNICAL DATA:

STRUCTURE	150 LT.
WIDTH	800 mm
DEPHT	900 mm
HEIGHT	900 mm
NET WEIGHT	138 kg
VOLUME	1.1 m3
ELECTRIC POWER	21 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

WELL CAPACITY	150 LT.
WELL DIMENSIONS	Ø 595x530 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**PANS**	**ELECTRONIC**	**NEPE9I15E**

FEATURES:


"Electronic Boiling Pan, Monoblock unit with indirect heating made of stainless steel AISI 304. Stainless steel top (AISI 304), thickness 20/10, pre-fitted for head-to-head connection. Pan bottom made of stainless steel AISI 316L, polished, sides made of stainless steel AISI 304. 150 lt. - well capacity. Hot or cold water load via electric valve, fixed tap on the top. 2"" safety drain tap with thermostable grip. Lid opening 90°, balanced by front and side handle. Indirect heating by low pressure steam generated thanks to the water contained in the interspace of the kettle: pressure gauge assisted conduction and compensation valve. Control system with signal light in case of low water levels in the interspace, heating is activated again as soon as water is refilled up to standard level. Indirect heating via shielded electrical resistances inside the interspace. Thick insulating panels provide thermal insulation for the kettle. Control and operational settings via backlit computer with touch technology, black musk. Precise temperature control at ° C, three timers integrated with buzzer and auto shut off to decrease power consumption, standby function with adjustable set point, audible and visual signals for set timings and temperatures, temperature also displayed when appliance is turned off, auto diagnose system to check that appliance is operating correctly and low voltage digital inputs to optimize power consumption. Electronically controlled cooking temperature. Kettle diameter 60 cm. Model with safety thermostat and rest button accessible to the user. Height-adjustable feet in stainless steel."

OPTIONAL ACCESSORIES:

• Pasta basket 2 sections 150lt.	0102331

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**PANS**	**ELECTRONIC**	**NEPE9I15E**

INSTALLATION SCHEME

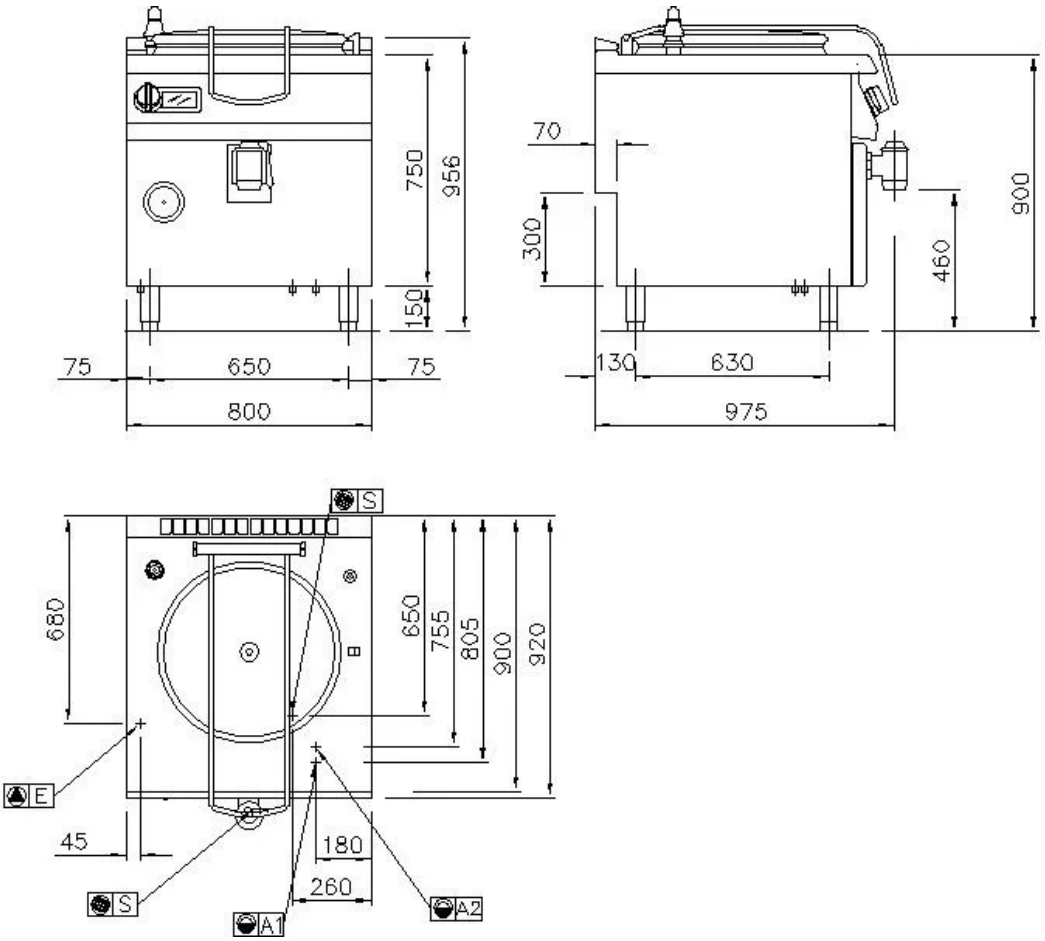

E1	SOCKET	400 V	3N
AF	COLD WATER	Ø "3/4"""	100 mm
AC	HOT WATER	Ø "3/4"""	100 mm
G	GAS		
S	DRAINING	Ø 40MM	0 mm

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it