Data sheet

NESE96CRAE

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**BRATT PANS**	**ELECTRONIC**	**NESE96CRAE**

DESCRIPTION

ELECTRONIC BRATT PAN DUPLEX 120 LITRES, AUTOMATIC TILTING



TECHNICAL DATA:

STRUCTURE	DUPLEX
WIDTH	1200 mm
DEPHT	900 mm
HEIGHT	900 mm
NET WEIGHT	220 kg
VOLUME	1.4 m3
ELECTRIC POWER	13.5 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

WELL CAPCITY	120 LT.
WELL DIMENSIONS	1126x580x169 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**BRATT PANS**	**ELECTRONIC**	**NESE96CRAE**


FEATURES:

Tilting Bratt Pan, electric version, made of stainless steel AISI 304. Stainless steel cooking tank with motorized tilting mechanism, 120-litre capacity, rectangular shape with radiused corners for easy cleaning, duplex bottom (FE3430 & Aisi 316), bottom thickness 12 mm. Double walled lid with drip nozzle in the back to convey condensate liquid into the tank, fitted with sturdy AISI 304 stainless steel hinges with spring balancing. Automatic water loading activated on the control panel Water tap fixed on top. Satin-finish AISI 304 tubular steel handle with front grip, sealed to lid. Heating by means of shielded electrical resistances positioned underneath the well. Control and operational settings via backlit computer with touch technology, black musk. Precise temperature control at ° C, three timers integrated with buzzer and auto shut off to decrease power consumption, standby function with adjustable set point, audible and visual signals for set timings and temperatures, temperature also displayed when appliance is turned off, auto diagnose system to check that appliance is operating correctly and low voltage digital inputs to optimize power consumption. Appliance pre-fitted for probe with acoustic signal when the core temperature is reached. Electronic temperature control with settings between 0°C and 280°C. Safety thermostat included. Heating is turned off automatically when pan is tilted. Height-adjustable feet in stainless steel.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**BRATT PANS**	**ELECTRONIC**	**NESE96CRAE**

INSTALLATION SCHEME

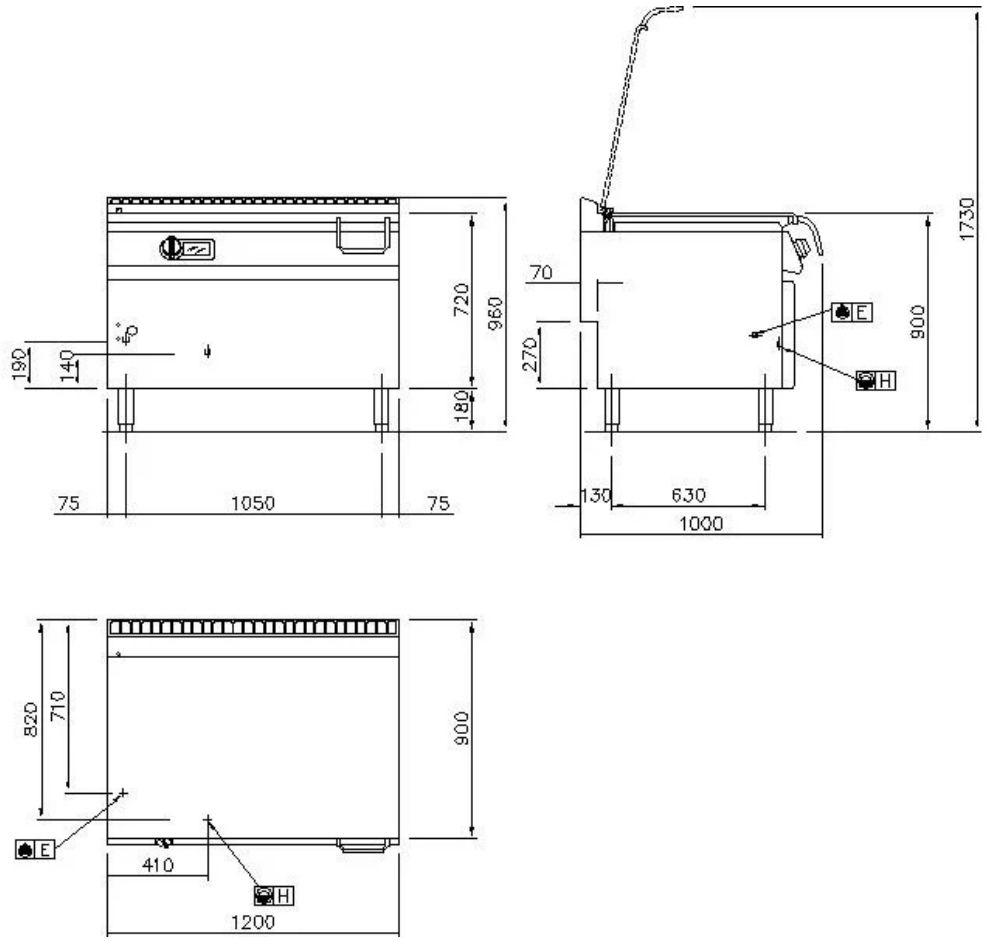

E1	SOCKET	400 V	3N
AF	COLD WATER	Ø 3/4"	100 mm
AC	HOT WATER		
G	GAS		
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it