Data sheet

NEUE93A

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**SONIKA**	**ELECTRIC**	**NEUE93A**

DESCRIPTION

Focused ultrasonic maturer with low temperature cooking function



TECHNICAL DATA:

STRUCTURE	CUPBOARD
WIDTH	600 mm
DEPHT	920 mm
HEIGHT	914 mm
NET WEIGHT	113 kg
VOLUME	0.5 m3
ELECTRIC POWER	3.3 kW
PHASE	1N
FREQUENCY	50/60 Hz
VOLTAGE	230 V

WELL CAPACITY	50 lt.
WELL DIMENSIONS	306x508x300 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**SONIKA**	**ELECTRIC**	**NEUE93A**


FEATURES:

Sonika is a piece of equipment that utilizes innovative focused ultrasound technology, specifically applied for the treatment of all types of food. Additionally, thanks to the low-temperature cooking function, it is possible to cook food after the ultrasound treatment, thus optimizing the preparation process.
The machine is made of AISI 304 stainless steel and AISI 316 for the tank. It features a 4-inch capacitive display and is equipped with an advanced GSM interconnection system, allowing efficient remote management. Automatic loading and unloading in the tank simplify operations, while water level control, managed by an optoelectronic sensor, ensures precision and reliability. Sonika includes a stainless steel AISI 316 basket for bags, combining robustness and practicality in a single device.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
900	**SONIKA**	**ELECTRIC**	**NEUE93A**

INSTALLATION SCHEME

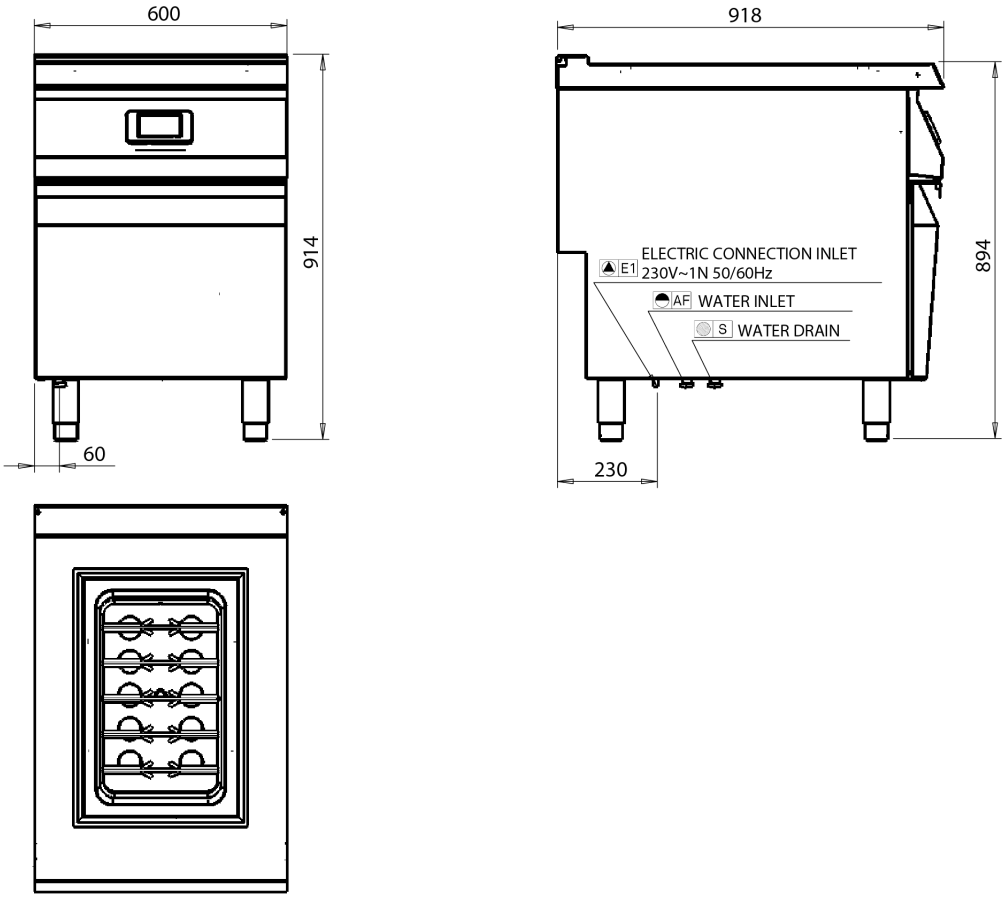

E1	SOCKET	230 V	1N
AF	COLD WATER	Ø 1/2"	
AC	HOT WATER		
G	GAS		
S	DRAINING	Ø 1/2"	

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it