Data sheet

# NEWK73G114

| SERIES | PRODUCT FAMILY | VERSION | MODEL |
|---|---|---|---|
| **700** | **WOK** | **GAS** | **NEWK73G114** |



## DESCRIPTION

WOK GAS RANGE 1 BURNER ON OPEN MODULE

## TECHNICAL DATA:

| | |
|---|---|
| STRUCTURE | OPEN BASE |
| WIDTH | 600 mm |
| DEPHT | 730 mm |
| HEIGHT | 900 mm |
| NET WEIGHT | 72 kg |
| VOLUME | 0.4 m3 |
| GAS POWER | 14 kW |

| | |
|---|---|
| NR. COOKING ZONES | 1 |

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

| SERIES | PRODUCT FAMILY | VERSION | MODEL |
|---|---|---|---|
| **700** | **WOK** | **GAS** | **NEWK73G114** |


## FEATURES:

Gas Range Wok, 1 burner, Monoblock unit on open base. Worktop in stainless steel AISI304, top thickness 15/10 with all-around spillage basin, incl. drain pre-fitted for floor connection. Device equipped with 1 cast iron burner output: 14 kW developed for high thermal efficiency . Power regulation via valve tap with pilot burner and safety thermocouple. A large collector pan for liquids is placed underneath the top. A stable cast iron ring provides support for WOK pans, it is RAAF enamelled (acid, alkali and flame resistant). Height-adjustable feet in stainless steel.

## OPTIONAL ACCESSORIES:

| SERIES | PRODUCT FAMILY | VERSION | MODEL |
|---|---|---|---|
| 700 | WOK | GAS | NEWK73G114 |

## INSTALLATION SCHEME

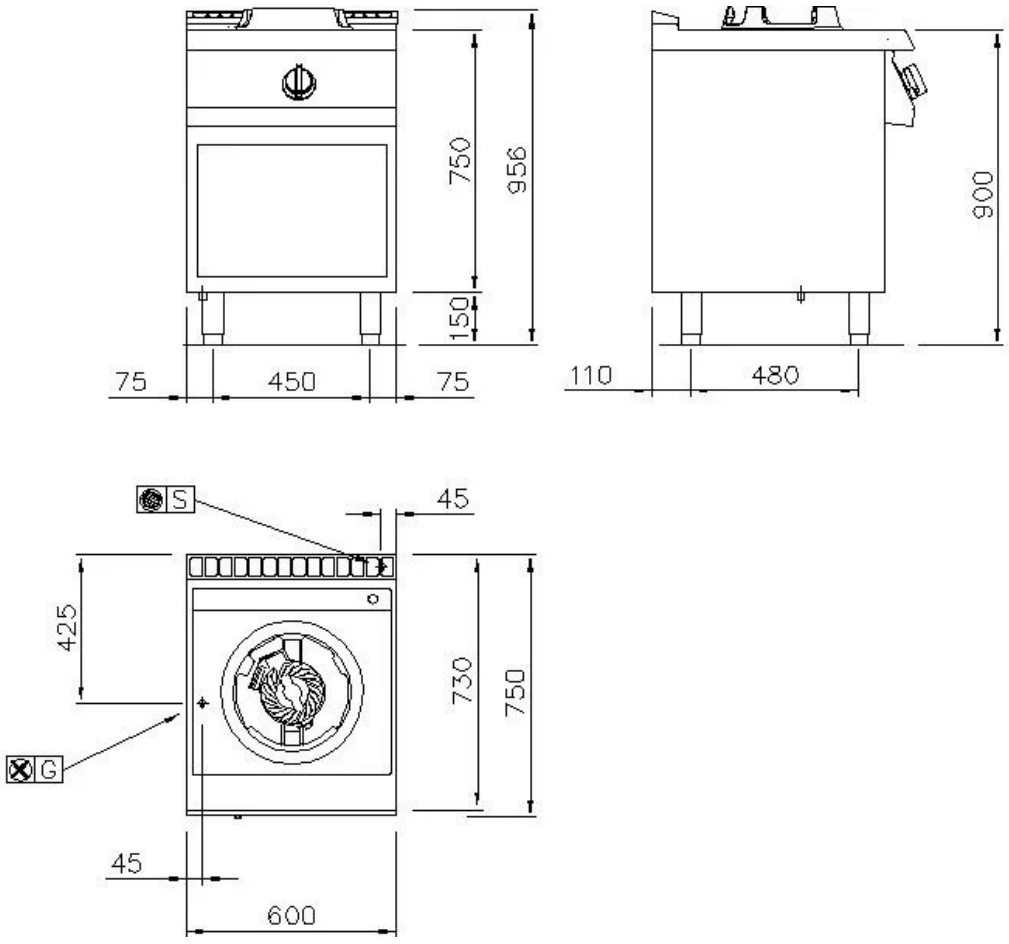


| | | | |
|---|---|---|---|
| E1 | SOCKET | | |
| AF | COLD WATER | | |
| AC | HOT WATER | | |
| G | GAS | Ø 1/2" | 100 mm |
| S | DRAINING | | |

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght ( except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it