Data sheet

NEWK75G214

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**WOK**	**GAS**	**NEWK75G214**



DESCRIPTION

WOK GAS RANGE 2 BURNERS ON OPEN MODULE

TECHNICAL DATA:

STRUCTURE	OPEN BASE
WIDTH	1000 mm
DEPHT	730 mm
HEIGHT	900 mm
NET WEIGHT	100 kg
VOLUME	0.66 m3
GAS POWER	28 kW

NR. COOKING ZONES	2

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	**WOK**	**GAS**	**NEWK75G214**


FEATURES:

Gas Range Wok, 2 burners, Monoblock unit on open base. Worktop in stainless steel AISI304, top thickness 15/10 with all-around spillage basin, incl. drain pre-fitted for floor connection. Device equipped with 2 cast iron burners output: 14 kW developed for high thermal efficiency . Power regulation via valve tap with pilot burner and safety thermocouple. A large collector pan for liquids is placed underneath the top. A stable cast iron ring provides support for WOK pans, it is RAAF enamelled (acid, alkali and flame resistant). Height-adjustable feet in stainless steel.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
700	WOK	GAS	NEWK75G214

INSTALLATION SCHEME

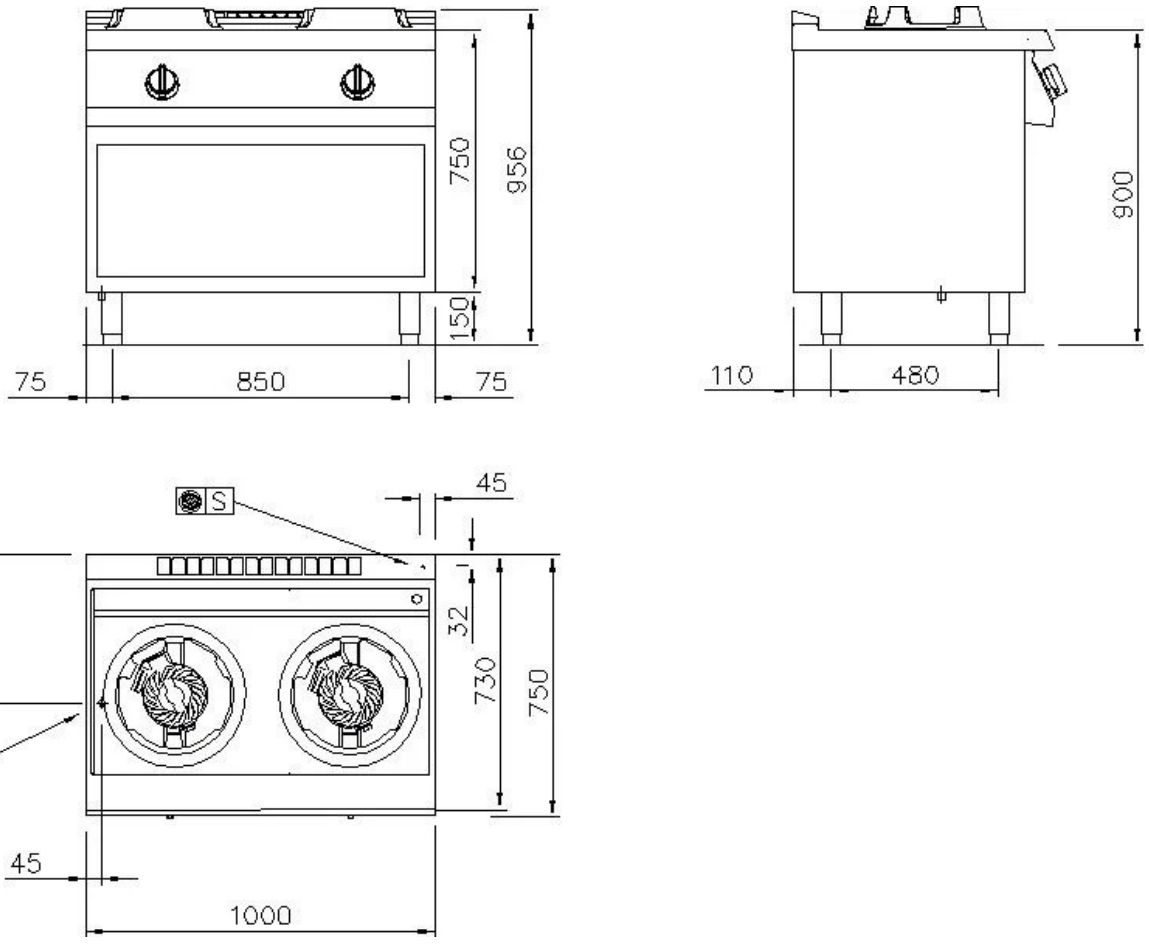

E1	SOCKET		
AF	COLD WATER		
AC	HOT WATER		
G	GAS	Ø 1/2"	100 mm
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it