SERIES	PRODUCT FAMILY	VERSION	MODEL
1100	**WOK**	**GAS**	**NNEWKP2G**

DESCRIPTION

GAS WOK WITH TWO 14 KW BURNERS ON OPEN PASS-THROUGH UNIT



TECHNICAL DATA:

STRUCTURE	OPEN BASE - PASS-THROUGH
WIDTH	600 mm
DEPHT	1100 mm
HEIGHT	850 mm
NET WEIGHT	92 kg
VOLUME	0.6 m3
GAS POWER	28 kW

PLATE SIZE	Ø 190 mm
NR. COOKING ZONES	2

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
1100	**WOK**	**GAS**	**NNEWKP2G**


FEATURES:

Single-piece through gas wok cooker with controls on two sides, on open compartment, made of AISI 304 stainless steel. Worktop thickness 20/10. High-performance vertical flame burner for even heating of the pan and perfect cooking of food. Enamelled cast iron burners 2 x 14 KW Ø 190 mm with stainless steel venturi system, removable for easy cleaning and maintenance. Cooking surface made of reinforced AISI 304 stainless steel with thickness 20/10. Power control via safety tap with thermocouple. Ignition of the main burner via permanent pilot burner. Wok support grid Ø 215 mm. made of enamelled cast iron with base Ø 410 mm. Top with 400x920 mm. containment basin and rear right drain Ø 22 mm. prepared for ground connection. Optional water filling system for cooling and cleaning the top. Removable drip tray positioned under the burners. Appliance equipped with height-adjustable stainless steel feet. Doors not supplied.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
1100	**WOK**	**GAS**	**NNEWKP2G**

INSTALLATION SCHEME

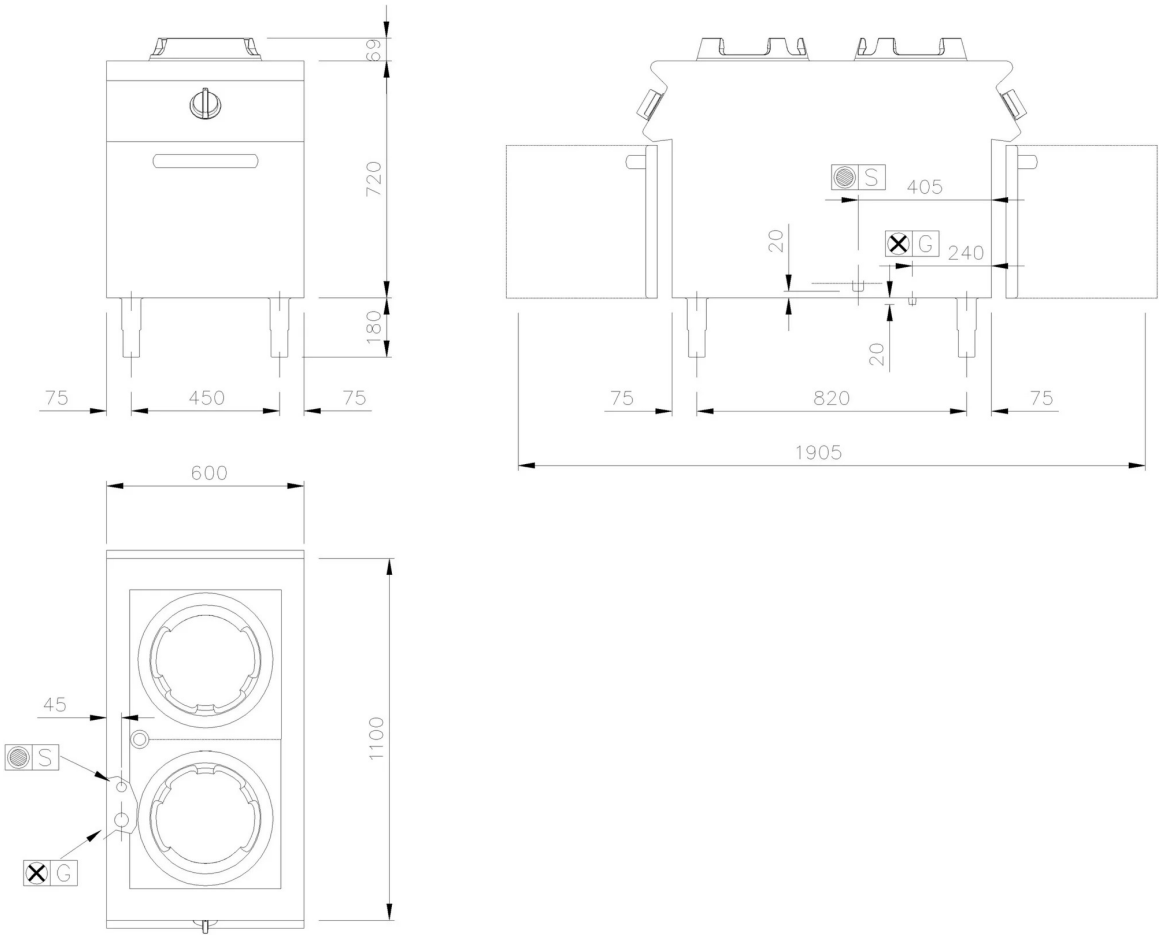

E1	SOCKET		
AF	COLD WATER		
AC	HOT WATER		
G	GAS	Ø 1/2"	100 mm
S	DRAINING	Ø 22 mm	

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it