SERIES	PRODUCT FAMILY	VERSION	MODEL
650	SALAMANDER		SEM60



DESCRIPTION

ELECTRIC LIGHT SALAMANDER WITH MOVABLE
AISI 430 TOP

TECHNICAL DATA:

WIDTH	600 mm
DEPHT	450 mm
HEIGHT	500 mm
NET WEIGHT	46.9 kg
VOLUME	0.27 m3
ELECTRIC POWER	4 kW
FREQUENCY	50/60 Hz
VOLTAGE	220 V

PLATE SIZE	600x350 mm
NR. COOKING ZONES	2

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**SALAMANDER**		**SEM60**


FEATURES:

Stainless steel AISI 430.
Tiltable heating elements for easy cleaning.
Drip trays for collecting sauces and removable chrome-plated grates for cleaning. The SEM60 model has two independent cooking zones.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	SALAMANDER		SEM60

INSTALLATION SCHEME

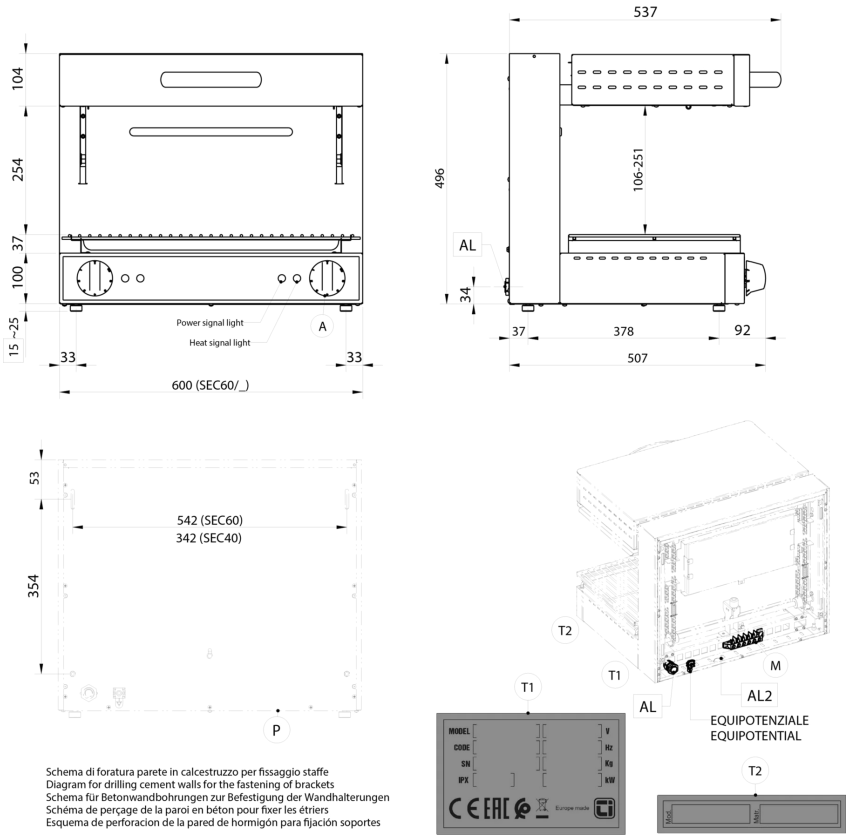

Schema di foratura parete in calcestruzzo per fissaggio staffe
Diagram for drilling cement walls for the fastening of brackets
Schema für Betonwandbohrungen zur Befestigung der Wandhalterungen
Schéma de perçage de la paroi en béton pour fixer les étriers
Esquema de perforacion de la pared de hormigón para fijación soportes

AL Entrata cavo elettrico | Power supply cable inlet | Netzkabeleingang | Entrée câble électrique | Entrada cable electrico.
AL2 Alternativo | Alternative | Alternative | Alternative | Alternativa

E1	SOCKET	220 V
AF	COLD WATER	
AC	HOT WATER	
G	GAS	
S	DRAINING	

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it