Data sheet

SEM60RT

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**SALAMANDER**		**SEM60RT**



DESCRIPTION

ULTRAFAST ELECTRIC SALAMANDER WITH MOVABLE TOP

TECHNICAL DATA:

WIDTH	600 mm
DEPHT	548 mm
HEIGHT	50 mm
NET WEIGHT	52 kg
VOLUME	0.31 m3
ELECTRIC POWER	4 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	380 V

PLATE SIZE	600x350 mm
NR. COOKING ZONES	2

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**SALAMANDER**		**SEM60RT**


FEATURES:

The Ultrarapid Salamanders guarantee exceptional performance thanks to infrared cooking, powered by tungsten resistors protected by a glass-ceramic plate. Designed for intensive use, they are made of satin-finish stainless steel AISI 304, meeting the highest standards of speed and efficiency. They are the ideal choice for demanding chefs focused on sustainable consumption. These Salamanders represent the pinnacle of evolution in their category. Perfect cooking uniformity is ensured by redesigned deflectors and the centering of the cooking surface under the radiant element. The time required to reach the maximum temperature is 20 seconds from ignition, with a maximum of 5 seconds during operation. The drip trays for collecting juices and the chrome-plated steel grates are removable, equipped with heat-resistant handles for easy cleaning. Rounded corners and adjustable feet offer flexibility, including the option of wall mounting. The more modern and functional control panel simplifies interaction. The handle is insulated by a bakelite spacer, and external surfaces are enhanced for increased safety and efficiency.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	SALAMANDER		SEM60RT

INSTALLATION SCHEME

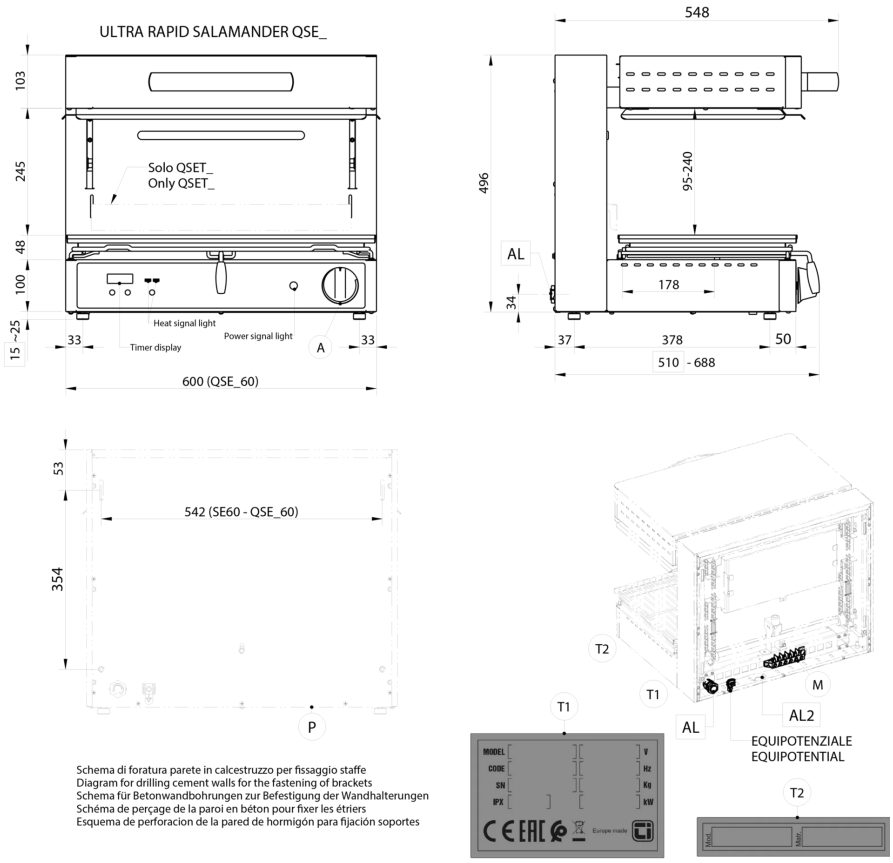

Schema di foratura parete in calcestruzzo per fissaggio staffe
Diagram for drilling cement walls for the fastening of brackets
Schema für Betonwandbohrungen zur Befestigung der Wandhalterungen
Schéma de perçage de la paroi en béton pour fixer les étriers
Esquema de perforacion de la pared de hormigón para fijación soportes

AL Entrata cavo elettrico | Power supply cable inlet | Netzkabeleingang | Entrée câble électrique | Entrada cable electrico.
AL2 Alternativo | Alternative | Alternative | Alternative | Alternativa

E1	SOCKET	380 V	3N
AF	COLD WATER		
AC	HOT WATER		
G	GAS		
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it