Data sheet

SEM60T

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**SALAMANDER**	**ELECTRIC**	**SEM60T**



DESCRIPTION

MOVABLE SALAMANDER EL. TRIPHASE

TECHNICAL DATA:

STRUCTURE	MOBILE
WIDTH	600 mm
DEPHT	450 mm
HEIGHT	500 mm
NET WEIGHT	47 kg
VOLUME	0.27 m3
ELECTRIC POWER	4 kW
PHASE	2N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

GRILL DIMENSIONS	600x350 mm

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**SALAMANDER**	**ELECTRIC**	**SEM60T**


FEATURES:

Electric Salamander, movable, made of stainless steel. Sliding upper board on rails, can be positioned on different levels. Two separate cooking zones controlled via power regulator. Heating by means of shielded electrical resistances with tilting mechanism for easy cleaning. Grid and container made of stainless steel, removable for cleaning. The device can be used as counter-top appliance thanks to its rubber feet.

OPTIONAL ACCESSORIES:

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**SALAMANDER**	**ELECTRIC**	**SEM60T**

INSTALLATION SCHEME

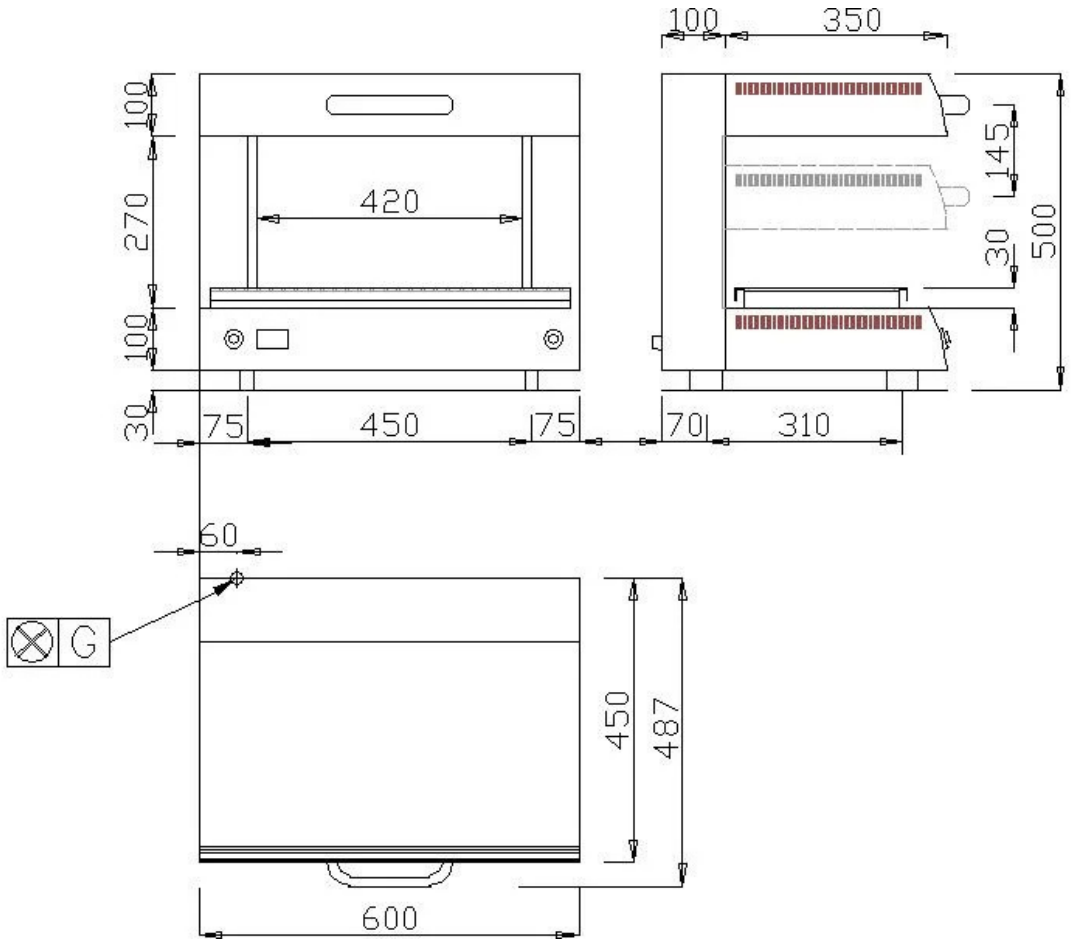

E1	SOCKET	400 V	2N
AF	COLD WATER		
AC	HOT WATER		
G	GAS		
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it