Data sheet

SFR670E1-21

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYERS PASTRY**	**ELECTRIC**	**SFR670E1-21**

DESCRIPTION

1 x 21 lt well, basket, dim 605x329x70. Rotation elements system for easier tank cleaning. Inside elements



TECHNICAL DATA:

WIDTH	700 mm
DEPHT	650 mm
HEIGHT	290 mm
NET WEIGHT	32 kg
VOLUME	0.27 m3
ELECTRIC POWER	6/9 kW
PHASE	3N
FREQUENCY	50/60 Hz
VOLTAGE	400 V

SILKO ALI Group Srl

Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYERS PASTRY**	**ELECTRIC**	**SFR670E1-21**

FEATURES:


Top Version - 1 x 21 lt well,
basket,
dim 605x329x70
Rotation elements
system for easier tank
cleaning.
Compete with 1 basket, 1
lid, 1 bottom grid.
Inside elements

OPTIONAL ACCESSORIES:

• Drainer	SGOC-FRP
• Anti-float grilles	STCR1059
• Neutral cabinet with door dim 700x525x615h	SUPC70
• Open support unit dim 700x525x615h	SUPN70

SERIES	PRODUCT FAMILY	VERSION	MODEL
650	**FRYERS PASTRY**	**ELECTRIC**	**SFR670E1-21**

INSTALLATION SCHEME

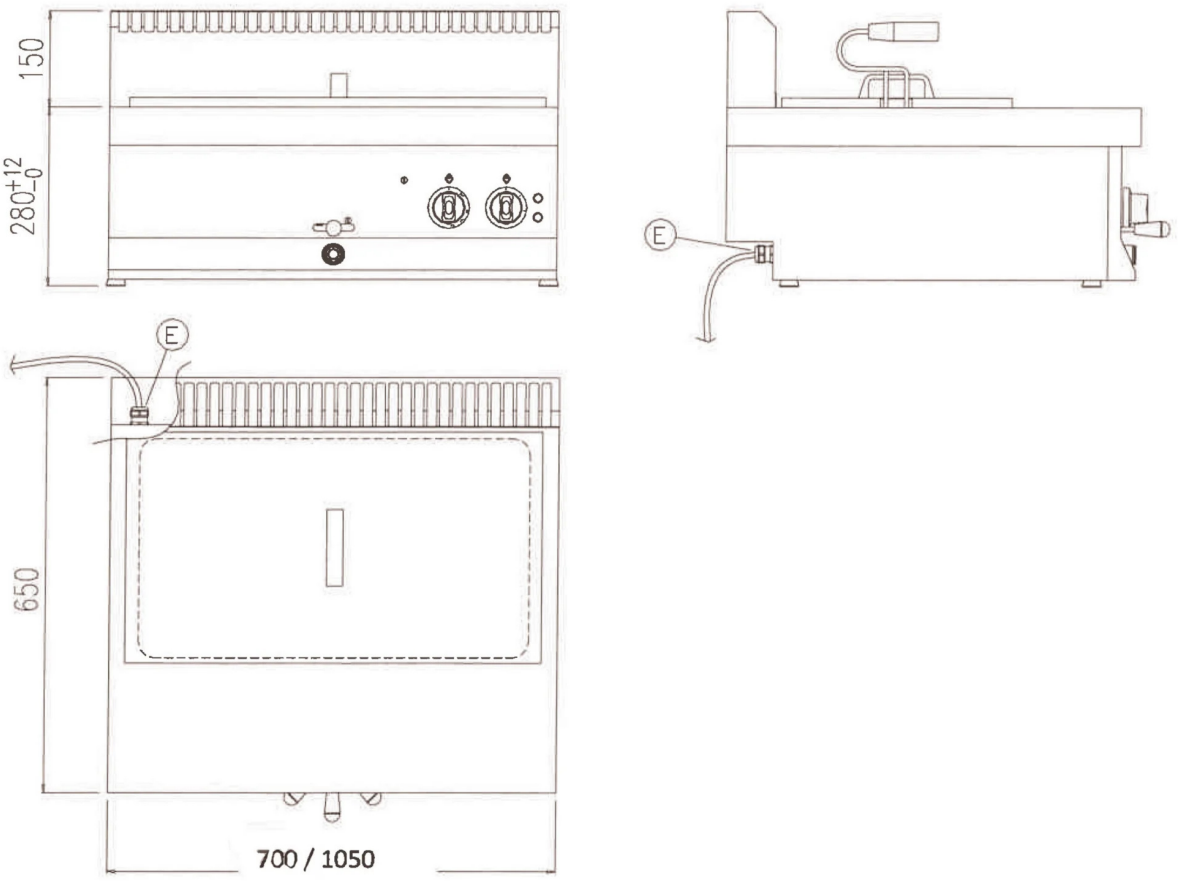

E1	SOCKET	400 V	3N
AF	COLD WATER		
AC	HOT WATER		
G	GAS		
S	DRAINING		

NOTES FOR THE INSTALLER:
All water and gas connections must be fitted with a shut-off valve or ball valve.
Main gas connections must be provided of closing gate device.
Gas connections must not use welded tubes.
Gas connections must be jacketed according to current rules in the country.
Electric connections must be provided of safety switch and a minimum exit wire of 1,5 meter lenght (except where otherwise required in the drawing).
All sockets must be built according to safety-rules in force. Suited for humid room and settled with necessary plug.
All electric connections must be provided of main switch.
The specification shown in this document are to be considered not bounding.
The company reserves the right to make technical changes at any moment.

SILKO ALI Group Srl
Uff. Commerciali:
Via F. Marinotti 45
31029 Vittorio Veneto (TV) ITALY
Tel. (+39) 0438 911930
C.F. e P.I. 13239980967

Sede Second. E Uff. Amm.vi:
Via Schiaparelli, 15 – Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) - ITALY
Tel. (+39) 0438 9110

Capitale Sociale € 20.000.000 I.V.
Società a Socio Unico
Sede Legale: Via Gobetti,2/A – 20063 Cernusco sul Naviglio (MI)
REA MI2711267- Registro Imprese Milano
www.silko.it - E-mail: info@silko.it