CONVOTHERM®

Condensation hood

Project _____

Item _____

Quantity _____


FCSI section _____

Approval _____

Date _____

Model

mini pro Condensation Hood FE



Key features

- For mini pro 6.06/6.10/10.10
- Available in stainless steel and in black
- Front extraction, direct extraction when the door is opened
- Automatic control via the mini pro combi oven
- Energy-efficient thanks to innovative standby operation during the cooking process
- Low noise level with a high degree of efficiency
- Very easy servicing; the heat exchanger is also replaceable
- Grease filter can be removed from the front without tools
- Enables easy cleaning
- 2 speeds: low & high
- Height of only 243 mm
- Can be retrofitted at any time
- Power is supplied via combi oven, no on-site mains connection required
- Can also be used with stacking kit
- No drain connection required, condensate is drained via mini pro combi oven

Option

- Available with a black finish

Dimensions and weights

Part number	3437030 (silver) 3437032 (black)
For combi ovens of size	mini pro 6.06
Dimensions	
Width x Depth x Height	504 x 688 x 243 mm
Dimensions including packaging	
Width x Depth x Height	635 x 884 x 453 mm
Weights	
Net weight	25.5 kg
Weight including packaging	30.5 kg

Part number	3437031 (silver) 3437033 (black)
For combi ovens of size	mini pro 6.10/10.10
Dimensions	
Width x Depth x Height	504 x 866 x 243 mm
Dimensions including packaging	
Width x Depth x Height	635 x 884 x 453 mm
Weights	
Net weight	28.5 kg
Weight including packaging	33.5 kg

Electrical supply

Electrical supply*	
Rated voltage	1N 220-240V 50/60Hz
Rated power consumption	180-275 W
Rated current	0.8-1.0 A

* Power supply and fuse protection integrated via combi oven

Accessories

Assembly set for stacking kit	Part number 3437215

Welbilt Deutschland GmbH
Talstrasse 35, 82436 Eglfing, Germany

Tel: +49(0)8847 67-0
Fax: +49(0)8847 67-392

www.convotherm.com

WELBILT an Ali Group Company

Safety clearances for installation*

Left-hand side	50 mm
Right side	50 mm
Top*	500 mm

* Depends on type of air ventilation system and nature of ceiling.

Air flow rate

Reduced speed	445 m³/h
Full speed	800 m³/h

Noise emission


Reduced speed	57 db
Full speed	max. 70 db

Marking


Marking	CE
Protection class	IPX4

Side view


Size 6.06



Size 6.10/10.10

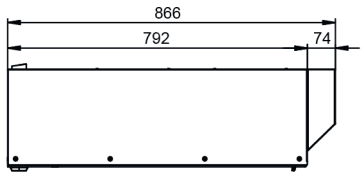

Front view



Please observe the following points:

- This document is to be used solely for planning purposes.
- Please refer to the mini pro Condensation Hood FE operating and installation instructions for further technical data and guidance on installation and positioning.

9737401_00 ENG_GBR 04/25, © 2025 Welbilt. Continuous improvements to the product may mean changes to the specification are made without explicit mention.

Welbilt Deutschland GmbH
Talstrasse 35, 82436 Eglfing, Germany

Tel: +49(0)8847 67-0
Fax: +49(0)8847 67-392

www.convotherm.com