Upright Cabinets

T-23DT-HC

Upright Foodservice "Dual Temperature" Cabinet, 2 Half Solid Swing Doors



Dimensions	
External Width (mm)	686
External Depth (mm)	750
External Height (mm)	2074
Exclusions	Depth does not include 13 mm for rear access panel.
Net Volume (Litres)	356
Gross Volume (Litres)	651
Supplied Shelves	4
Shelf Size (L x D mm)	582 x 591
Internal Net Height (mm)	650 + 450
Unpackaged Weight (kg)	141
Packaged Weight (kg)	152
Packaged Dimensions (W x D x H mm)	909 x 788 x 2134
Supplied with	⌀ 64 mm castors (83 mm height)

Build	
Door Description	2 Half Solid Swing Doors
Door Opening	Right (standard) or Left.
Exterior Construction	Stainless steel front, aluminium sides & rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Cord Length (Meters)	2.74
Internal Lighting	LED
Standard w/ Locks	standard

Technical	
Temperature Holding	0.5 : 3.3°C, -23°C
Refrigerant	R290
Voltage / Frequency / Phase	220-240V/50-60/1
Amps	2.3
Wattage	529
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Testing Standard	EN 16825
EEC	D
EEI	57.1
kWh/24hr	5.04
kWh/Annum	1840
Defrost Type	Auto

WARRANTY 5 YEARS PARTS, COMPRESSOR AND LABOUR

natural refrigerant.

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049
EMEA +41 61 563 07 05
Australia +61 2 9619 9999


TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com


2024-05-24

Upright Cabinets

T-23DT-HC

Upright Foodservice "Dual Temperature" Cabinet, 2 Half Solid Swing Doors

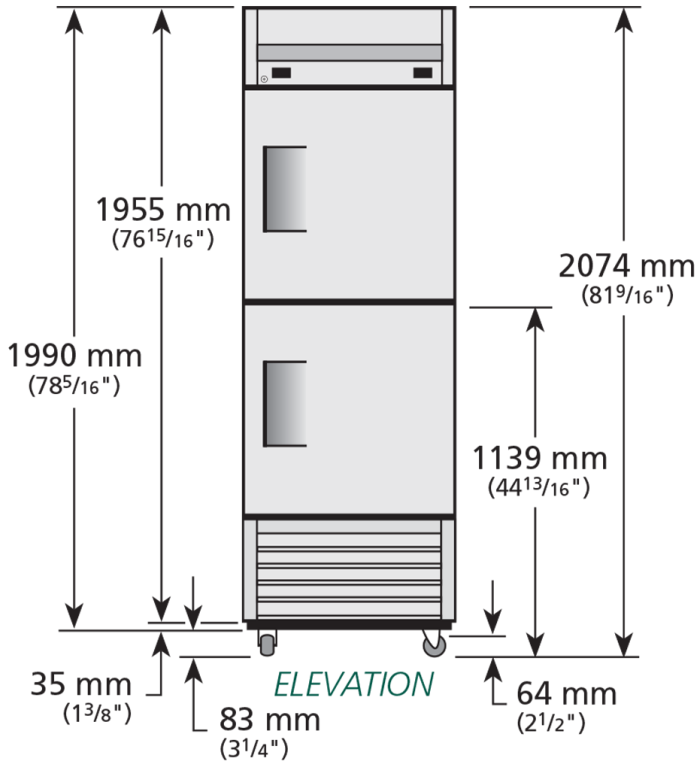

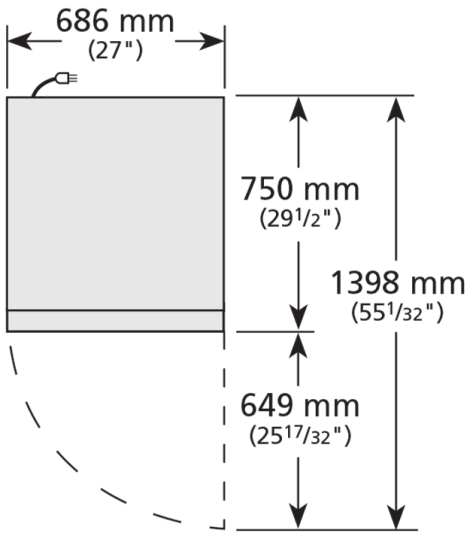

WARRANTY 5 YEARS PARTS, COMPRESSOR AND LABOUR

natural refrigerant.

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland	0800 783 2049	TFIUK@truemfg.com
EMEA	+41 61 563 07 05	TrueCHCustomerService@truemfg.com
Australia	+61 2 9619 9999	TrueRefAus@truemfg.com

2024-05-24